



Dubai Electronic Security Center

Dubai PKI

Devices CA

Certification Practice Statement

Title Devices CA Certification Practice Statement

Classification PUBLIC

File Name DubaiPKI-DevicesCA-CertificationPracticeStatement_v2.6

Created on 18 May 2017

Revision 2.6

Modified on 25 April 2026

Document History

Date	Revision	Author(s)	Summary
18 May 2017	0.1	Khawla Hassan	Initial version
12 September 2017	0.2	Khawla Hassan	Minor modifications & Incorporation of Dubai government entity Root CA option
3 November 2017	0.3	Khawla Hassan	Minor modifications to reflect control environment
11 January 2018	0.4	Khawla Hassan	Updating certificates profiles
18 January 2018	0.5	Khawla Hassan	Second revision of certificates profiles
30 January 2018	1.0	Khawla Hassan	Issue final version
25 February 2018	1.1	Khawla Hassan	Update SSL server certificate profile and add Verification response signing certificate Update publication of certificate information
16 October 2018	1.2	Khawla Hassan	<ul style="list-style-type: none">• Updates based on review of alignment with SSL BRs• Update the profiles of the SSL certificate and the Verification response signing certificate

Dubai PKI - Devices CA
Certificate Practice Statement

19 February 2019	1.3	Khawla Hassan	<ul style="list-style-type: none"> • Increase the life time of the TSA signing certificate to 5 years
29 July 2019	1.4	Khawla Hassan	Revise the IP validation methods for alignment with SSL BRs, update the profile of the Devices Certificate Profile
07 August 2019	1.5	Khawla Hassan	<ul style="list-style-type: none"> • Added contact and high-level procedure of Certificate Problem Report • Aligned the circumstances of revocation with the BRs • Clarified the responsibility of subscriber key generation
03 June 2020	1.6	Khawla Hassan	<ul style="list-style-type: none"> • Updates based on regular review and addressing Mozilla Comments
11 April 2021	1.7	Khawla Hassan	<ul style="list-style-type: none"> • Annual review and updates to address Mozilla comments and clarify subordinate CAs governance and operating environment
13 July 2021	1.71	Khawla Hassan	Increase the CRL lifetime to 72 hours
1 st April 2022	1.8	Khawla Hassan	<ul style="list-style-type: none"> • Annual review • General enhancements on the document • Remove the following certificate types: <ul style="list-style-type: none"> ○ TSA certificates

Dubai PKI - Devices CA
Certificate Practice Statement

			<ul style="list-style-type: none"> ○ Verification response signing certificates
7 th September 2022	1.9	Khawla Hassan	Correct typographical errors and general enhancements
6 th April 2023	2.0	Khawla Hassan	<ul style="list-style-type: none"> • Annual review • Add more clarifications on the time limits for re-use of validation information • Align the definitions and log retention with the SSL BRs
2 nd November 2023	2.1	Khawla Hassan	<ul style="list-style-type: none"> • Updates reflecting deactivation of Devices CA. This includes marking of relevant Certificate Policy OIDs as deprecated and updating relevant provisions to indicate that it is no longer supported under the Dubai PKI • Remove the references to SSL BRs
20 th February 2024	2.2	Khawla Hassan	<ul style="list-style-type: none"> • Add the authorityInfoAccess extension to the CRL
08 April 2024	2.3	Khawla Hassan	<ul style="list-style-type: none"> • Annual review • Correct language and typographical errors
17 April 2025	2.4	Mohamed Khalifa	Annual review
16 January 2026	2.5	Mohamed Khalifa	Announcement of planned decommissioning of Devices Certification Authority

Dubai PKI - Devices CA
Certificate Practice Statement

25 April 2026	2.6	Mohamed Khalifa	Updates to reflect the decommissioning of the Devices CA. The CPS has been revised to designate all operational sections as [Deprecated] , and consistent with the DESC Subordinate CAs Certificate Policy.
---------------	-----	-----------------	--

Table of Contents

DOCUMENT HISTORY	2
1. INTRODUCTION	13
1.1 Overview	13
1.1.1 Dubai PKI Hierarchy	13
1.1.2 Dubai PKI Policy Authority (PA)	14
1.1.3 Certificate Policy	15
1.1.4 Relationship Between the DESC Subordinate CAs CP and this CPS	15
1.1.5 Operational Status of the Devices Certification Authority	15
1.2 Document Name and Identification	15
1.3 PKI Participants	16
1.3.1 Certification Authorities	16
1.3.2 Registration Authorities	17
1.3.3 Subscribers	17
1.3.4 Relying Parties	17
1.3.5 Other Participants	17
1.4 Certificate Usage	17
1.4.1 Appropriate Certificate Use	17
1.4.2 Prohibited Certificate Use	18
1.5 Policy Administration	18
1.5.1 Organization Administering the Document	18
1.5.2 Contact Person	18
1.5.3 Person Determining CPS Suitability for the Policy	18
1.5.4 CPS Approval Procedures	19
1.6 Definitions, Acronyms and References	19
1.6.1 Definitions	19
1.6.2 Acronyms	24
2. PUBLICATION AND REPOSITORY RESPONSIBILITY	26
2.1 Repositories	26
2.2 Publication of Certificate Information	26
2.3 Time or Frequency of Publication Repositories	26
2.3.1 Certificates	26
2.3.2 CRLs	27
2.4 Access Controls on Repositories	27
3. IDENTIFICATION AND AUTHENTICATION	28
3.1 Naming	28
3.1.1 Types of Names	28
3.1.2 Need for names to be meaningful	28
3.1.3 Anonymity and Pseudonymity of Subscribers	28
3.1.4 Rules for Interpreting Various Name Forms	28

3.1.5	Uniqueness of Names	29
3.1.6	Recognition, Authentication and Role of Trademarks	29
3.2	Initial Identity Validation	29
3.2.1	Method to Prove Possession of Private Key	29
3.2.2	Authentication of Organization and Domain Identity	29
3.2.3	Authentication of Individual Identity	30
3.2.4	Non-Verified Subscriber Information	30
3.2.5	Validation of Authority	30
3.2.6	Criteria for Interoperation	30
3.3	Identification and Authentication for Re-keying Requests	30
3.3.1	Identification and Authentication for Routine Re-Keying	30
3.3.2	Identification and Authentication for Re-Key After Revocation	30
3.4	Identification and Authentication for Revocation Requests	30
4	CERTIFICATE LIFE CYCLE MANAGEMENT	31
4.1	Certificate Application	31
4.1.1	Who can Submit a Certificate Application	31
4.1.2	Enrolment Process and Responsibilities	31
4.1.3	Identification and Authentication for Routine Re-Keying	31
4.2	Certificate Application Processing	31
4.2.1	Performing Identification and Authentication Functions	31
4.2.2	Approval or Rejection of Certificate Applications	31
4.2.3	Time to Process Certificate Applications	31
4.3	Certificate Issuance	31
4.3.1	CA Actions During Certificate Issuance	32
4.3.2	Notification to Subscriber by the CA of Issuance of Certificate	32
4.4	Certificate Acceptance	32
4.4.1	Conduct Constituting Certificate Acceptance	32
4.4.2	Publication of the Certificate by the CA	32
4.4.3	Notification of Certificate Issuance by the CA to Other Entities	32
4.5	Key Pair and Certificate Usage	32
4.5.1	Subscriber Private Key and Certificate Usage	32
4.5.2	Relying Party Public Key and Certificate Usage	32
4.6	Certificate Renewal	32
4.6.1	Circumstance for certificate renewal	33
4.6.2	Who may request renewal	33
4.6.3	Processing certificate renewal requests	33
4.6.4	Notification of new certificate issuance to subscriber	33
4.6.5	Conduct constituting acceptance of a renewal certificate	33
4.6.6	Publication of the renewal certificate by the CA	33
4.6.7	Notification of certificate issuance by the CA to other entities	33
4.7	Certificate Re-Key	33
4.7.1	Circumstance for Certificate Re-key	33
4.7.2	Who May Request Certification of a New Public Key	33
4.7.3	Processing Certificate Re-Keying Requests	33
4.7.4	Notification of New Certificate Issuance to Subscriber	34
4.7.5	Conduct Constituting Acceptance of a Re-Keyed Certificate	34

4.7.6	Publication of the Re-keyed Certificate by the CA	34
4.7.7	Notification of Certificate Issuance by the CA to Other Entities	34
4.8	Certificate Modification	34
4.8.1	Circumstance for certificate modification	34
4.8.2	Who may request certificate modification	34
4.8.3	Processing certificate modification requests	34
4.8.4	Notification of new certificate issuance to subscriber	34
4.8.5	Conduct constituting acceptance of modified certificate	34
4.8.6	Publication of the modified certificate by the CA	34
4.8.7	Notification of certificate issuance by the CA to other entities	35
4.9	Certificate Revocation and Suspension	35
4.9.1	Circumstances for Revocation	35
4.9.2	Who can Request Revocation	35
4.9.3	Procedure for Revocation Request	35
4.9.4	Revocation Request Grace Period	35
4.9.5	Revocation Request Response Time	35
4.9.6	Revocation Checking Requirement for Relying Parties	35
4.9.7	CRL Issuance Frequency	36
4.9.8	Maximum Latency for CRLs	36
4.9.9	Online Revocation/Status Checking Availability	36
4.9.10	Online Revocation Checking Requirements	36
4.9.11	Other Forms of Revocation Advertisements Available	36
4.9.12	Special Requirements — Key Compromise	36
4.9.13	Circumstances for Suspension	36
4.9.14	Who Can Request Suspension	36
4.9.15	Procedure for Suspension Request	36
4.9.16	Limits on Suspension Period	37
4.10	Certificate Status Services	37
4.10.1	Operational Characteristics	37
4.10.2	Service Availability	37
4.10.3	Optional Features	37
4.11	End of Subscription	37
4.12	Key Escrow and Recovery	37
4.12.1	Key Escrow and Recovery Policy and Practices	38
4.12.2	Session Key Encapsulation and Recovery Policy and Practices	38
5.	FACILITY, MANAGEMENT AND OPERATIONAL CONTROLS	39
5.1	Physical Controls	39
5.1.1	Site Location and Construction	39
5.1.2	Physical Access	39
5.1.3	Power and air conditioning	39
5.1.4	Water Exposures	39
5.1.5	Fire Prevention and Protection	40
5.1.6	Media Storage	40
5.1.7	Waste Disposal	40
5.1.8	Offsite Backup	40
5.2	Procedural Controls	40
5.2.1	Trusted Roles	40
5.2.2	Number of Persons Required per Task	41
5.2.3	Identification and Authentication for Each Role	41

5.2.4	Roles Requiring Separation of Duties	41
5.3	Personnel Controls.....	41
5.3.1	Qualifications Experience and Clearance Requirements	42
5.3.2	Background Check Procedures	42
5.3.3	Training Requirements	42
5.3.4	Retraining Frequency and Requirements	42
5.3.5	Job Rotation Frequency and Sequence	42
5.3.6	Sanctions for Unauthorized Actions	42
5.3.7	Independent Contractor Requirements	43
5.3.8	Documentation Supplied to Personnel.....	43
5.4	Audit Logging Procedures.....	43
5.4.1	Types of Event Recorded	43
5.4.2	Frequency of Processing Log	45
5.4.3	Retention Period for Audit Log.....	45
5.4.4	Protection of Audit Log.....	45
5.4.5	Audit Log Backup Procedures	45
5.4.6	Audit Collection System (Internal vs. External)	46
5.4.7	Notification to Event-Causing Subject	46
5.4.8	Vulnerability Assessments	46
5.5	Records Archival	46
5.5.1	Types of Records Archived	46
5.5.2	Retention Period for Archive	46
5.5.3	Protection of Archive.....	47
5.5.4	Archive Backup Procedures	47
5.5.5	Requirements for Time stamping of Records	47
5.5.6	Archive Collection System (Internal or External).....	47
5.5.7	Procedures to Obtain and Verify Archive Information	47
5.6	Key Changeover	47
5.7	Compromise and Disaster Recovery	47
5.7.1	Incident and Compromise Handling Procedures	47
5.7.2	Computing Resources, Software Data Corruption	47
5.7.3	Entity Private Key Compromise Procedures	48
5.7.4	Business Continuity Capabilities After a Disaster	48
5.8	CA or RA Termination.....	49
6.	TECHNICAL SECURITY CONTROLS	50
6.1	Key Pair Generation	50
6.1.1	Key Pair Generation	50
6.1.2	Private Key Delivery to Subscriber.....	50
6.1.3	Public Key Delivery to Certificate Issuer	50
6.1.4	CA Public Key Delivery to Relying Parties	50
6.1.5	Key Sizes	50
6.1.6	Public Key Parameters Generation and Quality Checking	51
6.1.7	Key Usage Purposes (As per X.509 v3 Key Usage Field)	51
6.2	Private Key Protection and Cryptographic Module Engineering Controls	51
6.2.1	Cryptographic Module Standards and Controls	51
6.2.2	Private key (n out of m) multi-person control.....	51
6.2.3	Private Key Escrow	51
6.2.4	Private Key Backup	51

6.2.5	Private Key Archival	51
6.2.6	Private Key Transfer Into or From a Cryptographic Module.....	51
6.2.7	Private Key Storage on Cryptographic Module	52
6.2.8	Method of Activating Private Key	52
6.2.9	Method of Deactivating Private Key.....	52
6.2.10	Method of Destroying Private Key.....	52
6.2.11	Cryptographic Module Rating.....	52
6.3	Other Aspects of Key Pair Management.....	52
6.3.1	Public Key Archival.....	52
6.3.2	Certificate Operational Periods and Key Pair Usage Periods.....	52
6.4	Activation Data	52
6.4.1	Activation Data Generation and Installation	52
6.4.2	Activation Data Protection	53
6.4.3	Other Aspects of Activation Data	53
6.5	Computer Security Controls	53
6.5.1	Specific Computer Security Technical Requirements	53
6.5.2	Computer Security Rating.....	53
6.6	Life Cycle Technical Controls	53
6.6.1	System Development Controls	53
6.6.2	Security Management Controls.....	54
6.6.3	Life Cycle Security Controls	54
6.7	Network Security Controls	54
6.8	Time Stamping	54
7.	CERTIFICATE, CRL AND OCSP PROFILES	55
7.1	Certificate Profile.....	55
7.1.1	Version Number	55
7.1.2	Certificate Extensions	55
7.1.3	Algorithm Object Identifiers	55
7.1.4	Name Forms	55
7.1.5	Name Constraints	55
7.1.6	Certificate Policy Object Identifier.....	55
7.1.7	Usage of Policy Constraints Extension.....	55
7.1.8	Policy Qualifiers Syntax and Semantics	56
7.1.9	Processing Semantics for Critical Certificate Extensions	56
7.1.10	Devices Certificate Profile (Deprecated).....	56
7.1.11	SSL Certificate Profile (Deprecated).....	60
7.1.12	VPN Certificate Profile (Deprecated)	63
7.1.13	TSA Signing Certificate Profile (Deprecated)	68
7.2	CRL Profile.....	71
7.2.1	Version Number(s).....	71
7.2.2	CRL and CRL Entry Extensions.....	71
7.2.3	CRL ASN1 Description	71
7.3	OCSP Profile	73
7.3.1	Version Number(s).....	73
7.3.2	OCSP Extensions	73
7.3.3	OCSP Response Signing Certificate ASN1 Description	74

8. COMPLIANCE AUDIT AND OTHER ASSESSMENTS	77
9. OTHER BUSINESS AND LEGAL MATTERS	78
9.1 Fees	78
9.1.1 Certificate Issuance or Renewal Fees	78
9.1.2 Certificate Access Fees	78
9.1.3 Revocation or Status Information Access Fees.....	78
9.1.4 Fees for Other Service	78
9.1.5 Refund Policy	78
9.2 Financial Responsibility	78
9.2.1 Insurance Coverage	78
9.2.2 Other Assets	78
9.2.3 Insurance or Warranty Coverage for End-Entities.....	78
9.3 Confidentiality of Business Information	79
9.3.1 Scope of Confidential Information	79
9.3.2 Information not within the scope of confidential information	79
9.3.3 Responsibility to protect confidential information	79
9.4 Privacy of Personal Information	80
9.4.1 Privacy plan.....	80
9.4.2 Information treated as Private	80
9.4.3 Information not Deemed Private	80
9.4.4 Responsibility to protect private information	80
9.5 Intellectual Property Rights	80
9.6 Representations and Warranties	81
9.6.1 CA Representations and Warranties	81
9.6.2 RA Representations and Warranties	82
9.6.3 Subscriber Representations and Warranties.....	82
9.6.4 Relying Party Representations and Warranties.....	83
9.6.5 Representations and Warranties of Other Participants	83
9.7 Disclaimers of Warranties	83
9.8 Limitations of Liability	84
9.9 Indemnities	84
9.10 Term and Termination	84
9.10.1 Term.....	84
9.10.2 Termination	84
9.10.3 Effect of Termination and Survival	84
9.11 Individual Notices and Communications with Participants	84
9.12 Amendments	84
9.12.1 Procedure for Amendment.....	84
9.12.2 Notification Mechanism and Period	85
9.12.3 Circumstances Under Which OID Must be Changed	85
9.13 Dispute Resolution Procedures	85
9.14 Governing Law	85

9.15 Compliance with Applicable Law	85
9.16 Miscellaneous Provisions	85
9.16.1 Entire Agreement.....	85
9.16.2 Assignment	85
9.16.3 Severability	85
9.16.4 Enforcement (Attorney Fees/Waiver of Rights)	86
9.16.5 Force Majeure.....	86
9.17 Other Provisions	86

1. Introduction

The Devices Certification Authority is a legacy Certification Authority within the Dubai PKI hierarchy. Following decommissioning, the Devices CA remains inactive and shall not perform any certificate issuance, renewal, re-key, or modification operations. This CPS is maintained solely for historical reference and relying party transparency, in accordance with the DESC Subordinate CAs CP. Certificate status information services generated prior to decommissioning, including CRL and OCSP, shall remain available for the duration and under the conditions specified in the publicly published Decommissioning Notice.

This CPS meets the formal requirements of Internet Engineering Task Force (IETF) [RFC 3647] regarding content, format and content. While certain clause titles are included according to the structure of [RFC 3647], the topic may not necessarily apply in the implementation of the Devices CA, such sections state “No stipulation”. Additional information is presented in subsections of the standard structure where required.

Further information about this document and the Devices CA can be obtained from the Dubai PKI Policy Authority (PA), which is representing the policy and governing body for the Dubai PKI including DESC Subordinate CAs. Contact information of the Dubai PKI PA is provided under section 1.5.

1.1 Overview

The “Dubai PKI” uses standard PKI technologies, policies and operating procedures and application interfaces. The Dubai PKI comprises the Dubai PKI Root CA that is the trust anchor of this PKI, which comes at the first level of the PKI hierarchy. The Dubai PKI also comprises currently multiple Subordinate Certification Authorities (CAs) hereinafter, DESC Subordinate CAs, which come at the second level of the PKI hierarchy. DESC owns and operates the Dubai PKI Root and the aforementioned Subordinate CAs to provide certification services that enable citizens, residents, government entities in the UAE to conduct secure electronic transactions; this includes securing the machine-to-machine communication where devices can transact securely, leveraging the PKI signing and encryption capabilities.

The Dubai PKI Root CA and DESC Subordinate CAs are established and operated by DESC. The mandate of DESC also includes the responsibility for providing PKI certification services in Dubai, encompassing the issuance and management of subordinate and end-entity certificates.

1.1.1 Dubai PKI Hierarchy

The below Figure depicts the Trust Model of the Dubai PKI. The Dubai PKI Root CA is the top authority in this PKI with regard to the digital certification services offered by Dubai PKI. The Dubai PKI Root CA signs DESC Subordinate CAs, which come at the second level of the PKI hierarchy. In addition, the Root CA also signs issuing CAs belonging to authorized government or private sector entities.

DESC is fulfilling the role of the Policy Authority (PA) for the Dubai PKI (hereinafter, Dubai PKI PA) shall authorize the Root certification services for DESC Subordinate CAs as well as the issuing CAs owned by other government or private sector entities.

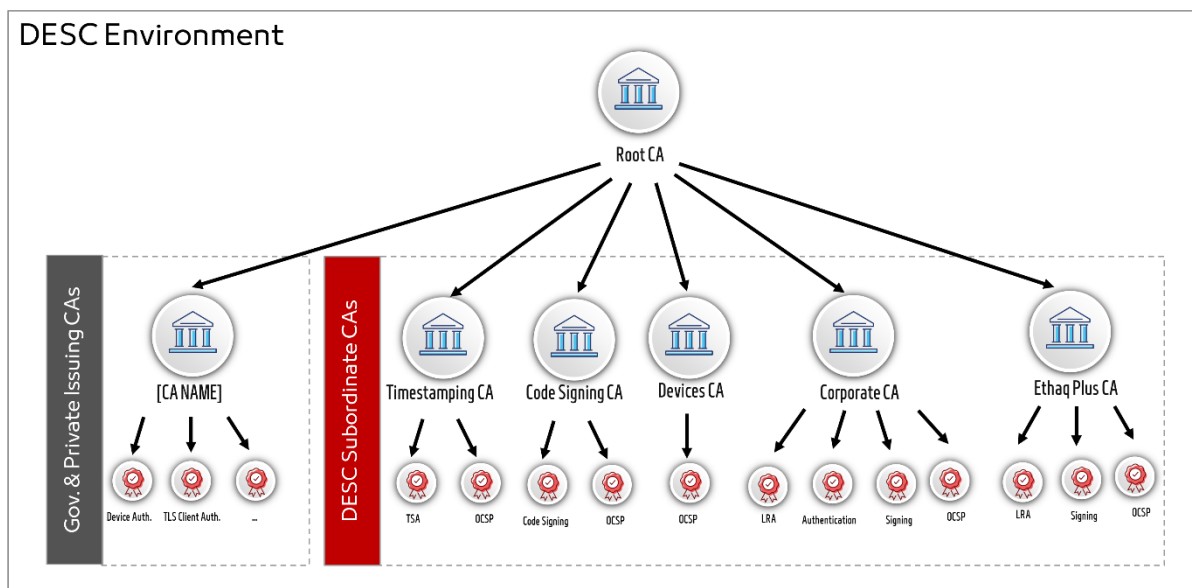


Figure 1: Trust Model for Dubai PKI

1.1.2 Dubai PKI Policy Authority (PA)

The Dubai PKI Policy Authority (PA), composed of appointed members of the DESC management and the Dubai PKI team, is representing the policy and governing body for the Dubai PKI, including the Devices CA. The PA is the highest-level management body with final authority and responsibility for:

- Specifying and approving the Dubai PKI infrastructure,
- Approving government and private sector entities applications to have their own Subordinate CA(s) within the Dubai PKI hierarchy,
- Specifying, maintaining and approving the Dubai PKI practices and policies, in particular the Certification Practice Statements (CPS) and the related Certificate Policies (CP) when applicable,
- Review annual audit report submitted by government or private sector entities CAs to ensure continuous compliance to Dubai PKI requirements,
- Review regular audit reports of LRAs,
- Enforcing CP/CPS and other policies applicable to Dubai PKI Environment,
- Defining the review process for such practices and policies including responsibilities for maintaining the Dubai PKI CPs/CPSs and related policies,
- Defining the review process that ensures that the Dubai PKI properly implements the above practices,
- Defining the review process that ensures that the related policies are supported by the Dubai PKI CPs and CPSs,
- Publication of CP and CPS documents,
- Specifying installation, key ceremonies, operation and life-cycle management (including deprecation) procedures of the Dubai PKI,
- Evaluating the proper working of the Dubai PKI environment,

- Allocating members to the key ceremonies as witness as well as trusted operatives and key custodians,
- Evaluating changes to the Dubai PKI environment (management, operational, hardware, software and security),
- Evaluating case-by-case issues where key Dubai PKI staff/personnel did not respect the security and/or operational procedures, including ethics,
- Deciding on critical issues in case of incidents, disasters and other severe problems with regards to the Dubai PKI.

1.1.3 Certificate Policy

X.509 certificates issued by the Devices CA to subscribers will contain a registered OID in the certificate policy extension that in turn shall be used by a Relying Party (RP) to decide whether a Certificate is trusted for a particular purpose. Subscriber Certificates issued by the Devices CA will identify the applicable policy in the certificate Policies extension by including applicable OID(s).

1.1.4 Relationship Between the DESC Subordinate CAs CP and this CPS

This CPS establishes the practices for the issuance, acceptance, maintenance, use, reliance upon, and revocation of digital certificates issued by the Devices CA as governed by DESC Subordinate CAs CP and related documents which describe the Dubai PKI requirements and use of Certificates.

1.1.5 Operational Status of the Devices Certification Authority

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

CRL and OCSP services will remain available until the latest CA certificate expiry date (08 April 2030).

1.2 Document Name and Identification

This document is named and referred to as “Dubai PKI — Devices CA Certificate Practice Statement”.

The Object Identifier of this CPS is OID is .2.16.784.1.2.2.100.1.2.1.2.

The Devices CA has been decommissioned and no longer issues certificates. The table below is yet retained solely to historical practices.

OID	Certificate Type	Description
2.16.784.1.2.2.100.1.2.2.3.1	Device certificates [Deprecated effective 12 th October 2023]	Certificates for general identification and authentication of devices
2.16.784.1.2.2.100.1.2.2.3.2	SSL certificates [Deprecated effective 12 th October 2023]	SSL certificates used for server authentication and session data encryption
2.16.784.1.2.2.100.1.2.2.3.3	VPN certificates	Certificates for device identification and session data encryption for VPN (IPsec-based connections)

	[Deprecated effective 12 th October 2023]	
2.16.784.1.2.2.100.1.3.1.1	Timestamping certificates [The Devices CA didn't <u>issue Timestamping Authority Certificates since 5th May 2021.</u> <u>Timestamping Authority Certificates have been issued from the</u> <u>Timestamping CA since then]</u>	Certificates intended for the Dubai PKI TSA (Timestamping Authority)

1.3 PKI Participants

The participants within the context of the Devices CA are as follows:

- Policy Authority (PA)
- Subordinate Certification Authorities
- Registration Authority (RA)
- Subscribers
- Relying Parties

These participants and their roles are described in the following sections.

1.3.1 Certification Authorities

The Devices CA (also referred to as “CA”) is the Certification Authority that issues Certificates in accordance with this CPS. The Devices CA issues certificates for IT systems and infrastructure devices and other devices belonging to Government entities in addition to OCSP response signing certificates. This includes the following tasks:

- **Registration Service** — it verifies the identity and, if applicable, any specific attributes of end-entities applying for certificates. The results of this service are passed to the certificate generation service.
- **Certificate Generation Service** — it issues end-entity certificates based on the verification conducted by the registration service
- **Dissemination Service** — it disseminates OCSP and Devices CA certificates and makes them available to relying parties. This service also makes available any public policy and practice information to Subscribers and relying parties.
- **Revocation Management Service** — it processes requests and reports revocation data for determining the appropriate action to be taken. The results of this service are available through the certificate validity status service.
- **Certificate Validity Status Service** — it provides certificate validity status information to relying parties based upon certificate suspension/revocation lists and an OCSP responder service. The status information shall always reflect the current status of the certificates issued by this CA.

1.3.2 Registration Authorities

The Registration Authority(RA) function described in this section reflect the role of the RA during the operational lifetime of the CA prior to its decommissioning. Following decommissioning, no registration, validation, or certificate request processing activities are performed.

Duly authorized members part of DESC PKI team act as RA for this CA. This team is involved in validating and accepting certificate issuance and management operations, in addition to triggering related certification operations by this CA.

DESC RA shall validate domain or any registration related information to establish the authenticity and eligibility of subscribers. DESC does not delegate the validation process of domain ownership or control to any third-party RA or LRA rather this process is performed only by DESC RA team. DESC RA shall document appropriate procedures for information validation.

1.3.3 Subscribers

IT systems, such as OCSP responder, TSA, web servers and infrastructure devices, such as VPNs, routers, switches and other devices.

Individuals with a formal mandate (authorization) request infrastructure certificates for devices and IT systems. They undergo a dedicated enrollment process through which they provide Certificate Signing Request (CSR) either automatically through the supported device enrollment protocols or manually by submitting CSR files to a designated DESC RA Officer.

Before issuing any certificate, the subscriber shall agree to the terms and conditions of DESC subscriber agreement.

1.3.4 Relying Parties

Relying Parties are entities that rely on a certificate and/or a digital signature verifiable with reference to a public key listed in a subscriber's certificate issued by the Devices CA.

Relying parties shall always verify the validity of a digital certificate issued by the Devices CA using the Devices CA Certificate Validations Services (e.g. CRL, OCSP), prior to relying on information featured in the certificate.

1.3.5 Other Participants

There are no other participants for this CA.

1.4 Certificate Usage

1.4.1 Appropriate Certificate Use

There are two categories of certificates supported by this CA. They are:

- **Certificates Issued for Timestamping Authority (TSA)** — Used to sign the time stamps issued by the Dubai Timestamping Authority service.
- **OCSP Certificates** — Used by the DESC Online Certificate Status Protocol (OCSP) responder to sign OCSP responses related to certificates issued by this CA.

In accordance with its purpose of use, the certificate may be used without limitations.

DESC reserves the right to issue any of the above-mentioned certificates for DESC internal testing and quality assurance purposes. Test certificates will be issued by DESC RA that enforces the following rules:

- test certificates have a short lifetime (in days),
- certificate subject DN for test certificates always includes the word “TEST”.

1.4.2 Prohibited Certificate Use

Certificates referred to in this CPS document shall not be used for purposes other than the ones listed above under Section 1.4.1 of this CPS document. Using certificates for other purposes is explicitly prohibited.

Certificates referred to in this CPS document shall not be used for man-in-the-middle (MITM) or traffic management of domain names or Ips that the certificate holder does not legitimately own or control. Such certificate usage is expressly prohibited.

1.5 Policy Administration

1.5.1 Organization Administering the Document

DESC, through the Dubai PKI PA, bears responsibility for the drafting, publishing, Object Identifier (OID) registration, maintenance and interpretation of this CPS and other policies and practices within the realm of the Dubai PKI.

1.5.2 Contact Person

Inquiries, suggested changes or notices regarding this CPS should be directed to **Dubai PKI Policy Authority:**

Dubai Electronic Security Center

PO Box 36996, Dubai, UAE

Phone +97144150400

E-mail pa@desc.gov.ae

Certificate Problem Report

Subscribers and Relying Parties, Application Software Suppliers, and other third parties may report suspected Private Key Compromise, Certificate misuse, or other types of fraud, compromise, misuse, inappropriate conduct, or any other matter related to Certificates by sending email to pki.support@desc.gov.ae.

DESC will validate and investigate the revocation request before taking an action in accordance with section 4.9.

1.5.3 Person Determining CPS Suitability for the Policy

The Dubai PKI PA determines the suitability of any CPS part of the Dubai PKI.

1.5.4 CPS Approval Procedures

A dedicated process involves the Dubai PKI PA reviewing the initial version of this CPS and any subsequent updates. Amendments shall either be in the form of a document containing an amended form of the CPS or an update notice. The PA formally approves the new version of the CPS.

In an effort to maintain credibility and promote trust in this CPS and better correspond to accreditation and legal requirements, the Dubai PKI PA shall review this CPS at least annually and may make revisions and updates to policies as it sees fit or as required by other circumstances. Any updates become binding for all Certificates that have been issued or are to be issued upon the date of the publication of the updated version of this CPS.

1.6 Definitions, Acronyms and References

1.6.1 Definitions

Applicant: The natural person or Legal Entity that applies for (or seeks renewal of) a Certificate. Once the Certificate is issued, the Applicant is referred to as the Subscriber. For Certificates issued to devices, the Applicant is the entity that controls or operates the device named in the Certificate, even if the device is sending the actual certificate request. In the context of this CPS, the applicants are Government entities subscribing to the Devices CA services.

Application Software Supplier: A supplier of Internet browser software or other relying-party application software that displays or uses Certificates and incorporates Root Certificates.

Attestation Letter: A letter attesting that Subject Information is correct written by an accountant, lawyer, government official, or other reliable third party customarily relied upon for such information. In the context of this CPS, attestation letters are signed by Human Resource teams of government entities.

Audit Period: In a period-of-time audit, the period between the first day (start) and the last day of operations (end) covered by the auditors in their engagement. (This is not the same as the period of time when the auditors are on-site at the CA.)

Audit Report: A report from a Qualified Auditor stating the Qualified Auditor's opinion on whether an entity's processes and controls comply with the mandatory provisions of these Requirements.

Authorization Domain Name: Authorization Domain Name: The FQDN used to obtain authorization for a given FQDN to be included in a Certificate. The CA may use the FQDN returned from a DNS CNAME lookup as the FQDN for the purposes of domain validation. If a Wildcard Domain Name is to be included in a Certificate, then the CA MUST remove "*" from the left-most portion of the Wildcard Domain Name to yield the corresponding FQDN. The CA may prune zero or more Domain Labels of the FQDN from left to right until encountering a Base Domain Name and may use any one of the values that were yielded by pruning (including the Base Domain Name itself) for the purpose of domain validation.

Authorized Representative: A natural person or human sponsor who is either the Applicant, employed by the Applicant, or an authorized agent who has express authority to represent the Applicant: (i) who signs and submits, or approves a certificate request on behalf of the Applicant, and/or (ii) who signs and submits a Subscriber Agreement on behalf of the Applicant, and/or (iii) who acknowledges the Terms of Use on behalf of the Applicant when the Applicant is an Affiliate of the CA or is the CA.

Base Domain Name: The portion of an applied-for FQDN that is the first Domain Name node left of a registry-controlled or public suffix plus the registry-controlled or public suffix (e.g. "example.co.uk" or "example.com"). For FQDNs where the right-most Domain Name node is a gTLD having ICANN Specification 13 in its registry agreement, the gTLD itself may be used as the Base Domain Name.

Baseline Requirements: The Baseline Requirements for the Issuance and Management of Publicly-Trusted Code Signing Certificates as published by the CA/Browser Forum.

CAA: From RFC 8659 (<http://tools.ietf.org/html/rfc8659>): “The Certification Authority Authorization (CAA) DNS Resource Record allows a DNS domain name holder to specify one or more Certification Authorities (CAs) authorized to issue certificates for that domain name. CAA Resource Records allow a public CA to implement additional controls to reduce the risk of unintended certificate mis-issue.”

CA Key Pair: A Key Pair where the Public Key appears as the Subject Public Key Info in one or more Root CA Certificate(s) and/or Subordinate CA Certificate(s).

Certificate: An electronic document that uses a digital signature to bind a public key and an identity.

Certification Authority: An organization that is responsible for the creation, issuance, revocation, and management of Certificates. The term applies equally to both Root CAs and Subordinate CAs.

Certificate Data: Certificate requests and data related there to (whether obtained from the Applicant or otherwise) in the CA’s possession or control or to which the CA has access.

Certificate Management Process: Processes, practices, and procedures associated with the use of keys, software, and hardware, by which the CA verifies Certificate Data, issues Certificates, maintains a Repository, and revokes Certificates.

Certificate Policy: A set of rules that indicates the applicability of a named Certificate to a particular community and/or PKI implementation with common security requirements.

Certificate Problem Report: Complaint of suspected Key Compromise, Certificate misuse, or other types of fraud, compromise, misuse, or inappropriate conduct related to Certificates.

Certificate Profile: A set of documents or files that defines requirements for Certificate content and Certificate extensions in accordance with Section 7 of this CPS.

Certificate Revocation List: A regularly updated time-stamped list of revoked Certificates that is created and digitally signed by the CA that issued the Certificates.

Certificate Requester: An authorized administrator of a device or system who is responsible for submitting the certification requests to the CA/RA.

Certification Authority: An organization that is responsible for the creation, issuance, revocation, and management of Certificates. The term applies equally to both Roots CAs and Subordinate CAs.

Certification Practice Statement: One of several documents forming the governance framework in which Certificates are created, issued, managed, and used.

Control: “Control” (and its correlative meanings, “controlled by” and “under common control with”) means possession, directly or indirectly, of the power to: (1) direct the management, personnel, finances, or plans of such entity; (2) control the election of a majority of the directors ; or (3) vote that portion of voting shares required for “control” under the law of the entity’s Jurisdiction of Incorporation or Registration but in no case less than 10%.

Country: Either a member of the United Nations OR a geographic region recognized as a Sovereign State by at least two UN member nations.

CSPRNG: A random number generator intended for use in a cryptographic system.

Delegated Third Party: A natural person or Legal Entity that is not the CA, and whose activities are not within the scope of the appropriate CA audits but is authorized by the CA to assist in the Certificate Management Process by performing or fulfilling one or more of the CA requirements found herein.

Domain Label: From RFC 8499 (<http://tools.ietf.org/html/rfc8499>): “An ordered list of zero or more octets that makes up a portion of a domain name. Using graph theory, a label identifies one node in a portion of the graph of all possible domain names.”

Domain Contact: The Domain Name Registrant, technical contact, or administrative contact (or the equivalent under a ccTLD) as listed in the WHOIS record of the Base Domain Name or in a DNS SOA record, or as obtained through direct contact with the Domain Name Registrar.

Domain Name: An ordered list of one or more Domain Labels assigned to a node in the Domain Name System.

Domain Namespace: The set of all possible Domain Names that are subordinate to a single node in the Domain Name System.

Domain Name Registrant: Sometimes referred to as the “owner” of a Domain Name, but more properly the person(s) or entity(ies) registered with a Domain Name Registrar as having the right to control how a Domain Name is used, such as the natural person or Legal Entity that is listed as the “Registrant” by WHOIS or the Domain Name Registrar.

Domain Name Registrar: A person or entity that registers Domain Names under the auspices of or by agreement with: (i) the Internet Corporation for Assigned Names and Numbers (ICANN), (ii) a national Domain Name authority/registry, or (iii) a Network Information Center (including their affiliates, contractors, delegates, successors, or assignees).

Expiry Date: The “Not After” date in a Certificate that defines the end of a Certificate’s validity period.

Fully-Qualified Domain Name: A Domain Name that includes the labels of all superior nodes in the Internet Domain Name System.

Government Entity: A Dubai government entity or other government entities in the UAE authorized by Dubai PKI PA to consume the PKI services.

Hardware Security Module: a device designed to provide cryptographic functions, especially the safekeeping of private keys.

High Risk Certificate Request: A Request that the CA flags for additional scrutiny by reference to internal criteria and databases maintained by the CA, which may include names at higher risk for phishing or other fraudulent usage, names contained in previously rejected certificate requests or revoked Certificates, names listed on the Miller Smiles phishing list or the Google Safe Browsing list, or names that the CA identifies using its own risk-mitigation criteria.

Internal Name: A string of characters (not an IP address) in a Common Name or Subject Alternative Name field of a Certificate that cannot be verified as globally unique within the public DNS at the time of certificate issuance because it does not end with a Top Level Domain registered in IANA’s Root Zone Database. IP Address: A 32-bit or 128-bit number assigned to a device that uses the Internet Protocol for communication.

IP Address: A 32-bit or 128-bit label assigned to a device that uses the Internet Protocol for communication.

IP Address Contact: The person(s) or entity(ies) registered with an IP Address Registration Authority as having the right to control how one or more IP Addresses are used.

IP Address Registration Authority: The Internet Assigned Numbers Authority (IANA) or a Regional Internet Registry (RIPE, APNIC, ARIN, AfriNIC, LACNIC).

Issuing CA: In relation to a particular Certificate, the CA that issued the Certificate. This could be either a Root CA or a Subordinate CA.

Key Compromise: A Private Key is said to be compromised if its value has been disclosed to an unauthorized person, or an unauthorized person has had access to it.

Key Generation Script: A documented plan of procedures for the generation of a CA Key Pair.

Key Pair: The Private Key and its associated Public Key.

Legal Entity: An association, corporation, partnership, proprietorship, trust, government entity or other entity with legal standing in a country's legal system.

Non-Reserved LDH Label: From RFC5890(<http://tools.ietf.org/html/rfc5890>): "The set of valid LDH labels that do not have '--' in the third and fourth positions."

Object Identifier: A unique alphanumeric or numeric identifier registered under the International Organization for Standardization's applicable standard for a specific object or object class.

OCSP Responder: An online server operated under the authority of the CA and connected to its Repository for processing Certificate status requests. See also, Online Certificate Status Protocol.

Online Certificate Status Protocol: An online Certificate-checking protocol that enables relying-party application software to determine the status of an identified Certificate. See also OCSP Responder.

Private Key: The key of a Key Pair that is kept secret by the holder of the Key Pair, and that is used to create Digital Signatures and/or to decrypt electronic records or files that were encrypted with the corresponding Public Key.

Policy Qualifier: Policy-dependent information that accompanies a certificate policy identifier in an X.509 certificate.

Public Key: The key of a Key Pair that may be publicly disclosed by the holder of the corresponding Private Key and that is used by a Relying Party to verify Digital Signatures created with the holder's corresponding Private Key and/or to encrypt messages so that they can be decrypted only with the holder's corresponding Private Key.

Public Key Infrastructure: A set of hardware, software, people, procedures, rules, policies, and obligations used to facilitate the trustworthy creation, issuance, management, and use of Certificates and keys based on Public Key Cryptography.

Publicly-Trusted Certificate: A Certificate that is distributed as a trust anchor in widely- available application software.

Qualified Auditor: A natural person or Legal Entity that meets the requirements of Section 8.2.

Random Value: A value specified by a CA to the Applicant that exhibits at least 112 bits of entropy.

Registered Domain Name: A Domain Name that has been registered with a Domain Name Registrar.

Registration Authority (RA): Any Legal Entity that is responsible for identification and authentication of subjects of Certificates, but is not a CA, and hence does not sign or issue Certificates. An RA may assist in the certificate application process or revocation process or both. When "RA" is used as an adjective to describe a role or function, it does not necessarily imply a separate body, but can be part of the CA.

Reliable Data Source: An identification document or source of data used to verify Subject Identity Information that is generally recognized among commercial enterprises and governments as reliable, and which was created by a third party for a purpose other than the Applicant obtaining a Certificate. In the context of this CPS, the UAE official gazette is the reliable data source for government entities in UAE.

Reliable Method of Communication: A method of communication, such as a postal/courier delivery address, telephone number, or email address, that was verified using a source other than the Applicant Requester.

Relying Party: Any natural person or Legal Entity that relies on a Valid Certificate. An Application Software Supplier is not considered a Relying Party when software distributed by such Supplier merely displays information relating to a Certificate.

Repository: An online database containing publicly-disclosed PKI governance documents (such as Certificate Policies and Certification Practice Statements) and Certificate status information, either in the form of a CRL or an OCSP response.

Reserved IP Address: An Ipv4 or Ipv6 address that is contained in the address block of any entry in either of the following IANA registries:

<https://www.iana.org/assignments/iana-ipv4-special-registry/iana-ipv4-special-registry.xhtml>
<https://www.iana.org/assignments/iana-ipv6-special-registry/iana-ipv6-special-registry.xhtml>

Root CA: The top level Certification Authority whose Root Certificate is distributed by Application Software Suppliers and that issues Subordinate CA Certificates.

Root Certificate: The self-signed Certificate issued by the Root CA to identify itself and to facilitate verification of Certificates issued to its Subordinate CAs.

Sovereign State: A state or country that administers its own government, and is not dependent upon, or subject to, another power.

Subject: The natural person, device, system, unit, or Legal Entity identified in a Certificate as the Subject. The Subject is either the Subscriber or a device under the control and operation of the Subscriber.

Subject Identity Information: Information that identifies the Certificate Subject. Subject Identity Information does not include a domain name listed in the subjectAltName extension or the Subject commonName field.

Subordinate CA: A Certification Authority whose Certificate is signed by the Root CA, or another Subordinate CA.

Subscriber: A natural person or Legal Entity to whom a Certificate is issued and who is legally bound by a Subscriber Agreement or Terms of Use.

Subscriber Agreement: An agreement between the CA and the Applicant/Subscriber that specifies the rights and responsibilities of the parties.

Technically Constrained Subordinate CA Certificate: A Subordinate CA certificate which uses a combination of Extended Key Usage settings and Name Constraint settings to limit the scope within which the Subordinate CA Certificate may issue Subscriber or additional Subordinate CA Certificates.

Terms of Use: Provisions regarding the safekeeping and acceptable uses of a Certificate issued in accordance with these Requirements when the Applicant/Subscriber is an Affiliate of the CA or is the CA.

Trusted Role: Those individuals who perform a security role that is critical to the operation or integrity of a PKI.

Trustworthy System: Computer hardware, software, and procedures that are: reasonably secure from intrusion and misuse; provide a reasonable level of availability, reliability, and correct operation; are reasonably suited to performing their intended functions; and enforce the applicable security policy.

Valid Certificate: A Certificate that passes the validation procedure specified in RFC 5280.

Validation Specialist: Someone who performs the information verification duties specified by this CPS and the Baseline Requirements.

Validity Period: From RFC 5280 (<http://tools.ietf.org/html/rfc5280>): "The period of time from notBefore through notAfter, inclusive."

WHOIS: Information retrieved directly from the Domain Name Registrar or registry operator via the protocol defined in RFC 3912, the Registry Data Access Protocol defined in RFC 7482, or an HTTPS website.

Wildcard Certificate: A Certificate containing at least one Wildcard Domain Name in the Subject Alternative Names in the Certificate.

Wildcard Domain Name: A string starting with "*" (U+002A ASTERISK, U+002E FULL STOP) immediately followed by a Fully-Qualified Domain Name.

1.6.2 Acronyms

CA — Certification Authority

CCTV — Closed circuit TV

CP — Certificate Policy

CPS — Certification Practice Statement

CRL — Certificate Revocation List

DRP — Disaster Recovery Plan

DN — Distinguished Name

FIPS — Federal Information Processing Standards

FQDN — Fully Qualified Domain Name

HSM — Hardware Security Module

HTTP — Hyper Text Transfer Protocol

HVAC — Heating, Ventilation and Air Conditioning

IEC — International Electro-technical Commission

IETF — Internet Engineering Task Force

IPSEC — Internet Protocol Security

ISO — International Standards Organization

ITU — International Telecommunications Union

LDAP — Lightweight Directory Access Protocol, a common standard for accessing directories

DESC — Dubai Electronics Security Center

OID — Object Identifier

OSCP — Online Certificate Status Protocol

OTP — One Time Password

PA — Policy Authority of Dubai PKI

PIN — A Personal Identification Number or password used to protect the private information and keys on hardware tokens

PKCS # 1 — Public-Key Cryptography Standards (PKCS) #1

PKCS # 7 — Cryptographic Message Syntax

PKCS #10 — Certification Request Syntax Specification

PKCS #12 — Personal Information Exchange Syntax published by RSA Security

PKE — Public Key Encryption

PKI — Public Key Infrastructure

PKIX-CMP — Internet X.509 Public Key Infrastructure — Certificate Management Protocol.

RA — Registration Authority

RSA — The acronym for the inventors of the RSA algorithm; Ron Rivest, Adi Shamir and Leonard Adleman

SCEP — Simple Certificate Enrolment Protocol

Secret Shares — A set of devices, smart cards, PINs, etc. used with MofN control

SHA — Secure Hash Algorithm

S/MIME — Secure Multipurpose Internet Mail Extensions

SSL/TLS — Secure Sockets Layer/Transport Layer Security

SubjectAltName — A certificate extension that contains FQDNs or authenticated domains or email addresses that are under the control of the Subscriber

UPS — Uninterruptible Power Supply

URI — Universal Resource Identifier, a URL, FTP address, email address, etc.

X.501 — A common standard for directory entry naming (ITU)

X.509 — A public key certificate specification originally developed as part of the X.500 directory specification, often used in public key systems; It is now governed by IETF standards

2. Publication and Repository Responsibility

2.1 Repositories

DESC publishes information about all digital certificates it issues in (an) online publicly accessible repository at <https://ca-repository.desc.gov.ae/> that is also provided on a 24/7 basis.

2.2 Publication of Certificate Information

As part of the public repository, DESC publishes a copy of the Devices CA certificates, OCSP certificates and TSA certificates as well as this CPS.

DESC also retains other documents that make certain disclosures about the Devices CA practices, procedures, and the content of certain of its policies as part of the public repository. DESC reserves its right to make available and publish information on its policies by any means it sees fit.

DESC publishes digital certificate status information in frequent intervals as indicated in this CPS. The provision of the Devices CA issued electronic certificate validity status information is a 24/7 available service offered as follows;

- Published CRLs including any changes since the publication of the previous CRL, at regular intervals. The Devices CA adds a pointer (URL) to the relevant CRL to Subscribers' certificates as part of the CDP extension whenever this extension is present;
- An OCSP responder compliant with RFC 6960. The OCSP URL is referenced in the AIA extension of the Subscribers' certificates issued by the Devices CA.

2.3 Time or Frequency of Publication Repositories

Modified versions of this CPS and other published documents are published within five days maximum after the Dubai PKI PA approval.

Due to their sensitivity, DESC refrains from making publicly available certain subcomponents and elements of such documents including certain security controls, procedures related with the functioning of registration authorities, internal security polices, etc. Such documents and documented practices are, however, conditionally available to designated authorized parties in the context of audit(s) that DESC owes duty to with regard to the Devices CA activities.

2.3.1 Certificates

The Devices CA certificates, TSA certificate and OCSP Certificates are published to the Certificate Dissemination Webpage that is part of the public repository (<https://ca-repository.desc.gov.ae/>) as soon as they are issued.

2.3.2 CRLs

DESC maintains the CRL distribution point and the information on this URL for a minimum of seven years after the expiration date of all certificates, containing the CRL distribution point.

The Devices CA publishes CRLs at regular intervals according to the following rules:

- At the minimum, CRLs shall be refreshed every 26 hours, even if no changes have occurred since the last issuance.
- CRLs lifetime shall be set to 72 hours.

2.4 Access Controls on Repositories

Public read-only access to certificates, CRLs and documentation published to the repository is available.

Access controls are implemented on the repository to prevent any unauthorized addition or modification of any published data.

3. Identification and Authentication

3.1 Naming

3.1.1 Types of Names

This CA is identified in the Issuer's name field of the Subscriber certificates as follows:

cn=Devices Certification Authority, o=UAE Government, c=AE

The certificates issued by this CA contain X.500 Distinguished Names (DNs) as follows:

- **OCSP responder** — The DN format is:

cn = Devices Certification Authority OCSP "C<n>"
o = DESC
l = Dubai
c = AE

Where "C<n>" is added upon the CA key change over (as specified in section 6.3.2) where <n> is an incremental number starting from 2 and increasing after each CA key change over.

- **Dubai TSA** — The DN format is:

cn = Dubai Timestamping Authority
o = DESC
l = Dubai,
c = AE

3.1.2 Need for names to be meaningful

For Certificates issued for Devices and IT systems: Distinguished Names (DN) are used to identify both the subject and the issuer of the certificate in a meaningful way. Hence, this CA issues certificates to Subscribers (subjects) that demonstrate legitimately ownership and control on the domain names, IP addresses mentioned in the Subject DN.

For OCSP certificate: name is meaningful since it indicates the Devices CA OCSP name which is "Devices Certification Authority OCSP".

3.1.3 Anonymity and Pseudonymity of Subscribers

This CPS does not permit anonymous Subscribers. The issuance of certificates with internationalized domain names (IDNs) are not currently supported by this CA.

3.1.4 Rules for Interpreting Various Name Forms

No stipulation — this section is intentionally left blank.

3.1.5 Uniqueness of Names

A unique name of the OCSP responder shall be included in the subject DN to ensure uniqueness.

3.1.6 Recognition, Authentication and Role of Trademarks

Certificate applicants are prohibited from using names in their certificate application that infringe upon the Intellectual Property Rights of others. The Devices CA does not verify whether a certificate applicant has Intellectual Property Rights in the name appearing in a certificate application.

The Devices CA shall have the right to revoke a Certificate upon receipt of a properly authenticated order from DESC or court of competent jurisdiction requiring the revocation of a Certificate or Certificates containing a Subject name in dispute.

3.2 Initial Identity Validation

3.2.1 Method to Prove Possession of Private Key

Certificate Signing Requests (CSRs) generated by IT systems or devices contain a Proof-of-Possession (POP) of the private key as part of the certificate requests submitted to this CA.

3.2.2 Authentication of Organization and Domain Identity

3.2.2.1 Identity

Starting 12th October 2023, this CA is not going to issue end-entity certificates. However the CA services will be kept running to only maintain validation information and support revocation of Timestamping certificates issued on and before 5 May 2021.

For certificates issued to OCSP: an authorized administrator under the supervision of the Dubai PKI PA initiates the certification process. A dedicated operational key ceremony is documented by DESC.

3.2.2.2 DBA/Tradename

The use of DBA or Tradename in the Subject Identity Information is not supported by the Devices CA.

3.2.2.3 Validation of Domain Authorization or Control

Starting 12th October 2023, this CA is not going to issue end-entity certificates. However the CA services will be kept running to only maintain validation information and support revocation of Timestamping certificates issued on and before 5 May 2021.

3.2.2.4 Authentication for an IP Address

Starting 12th October 2023, this CA is not going to issue end-entity certificates. However the CA services will be kept running to only maintain validation information and support revocation of Timestamping certificates issued on and before 5 May 2021.

3.2.2.5 Wildcard Domain Validation

Starting 12th October 2023, this CA is not going to issue end-entity certificates. However the CA services will be kept running to only maintain validation information and support revocation of Timestamping certificates issued on and before 5 May 2021.

3.2.2.6 Data Source Accuracy

No stipulation — this section is intentionally left blank.

3.2.2.7 CAA records

No stipulation — this section is intentionally left blank.

3.2.3 Authentication of Individual Identity

Starting 12th October 2023, this CA is not going to issue end-entity certificates. However the CA services will be kept running to only maintain validation information and support revocation of Timestamping certificates issued on and before 5 May 2021.

For certificates issued to OCSP: an authorized administrator under the supervision of the Dubai PKI PA initiates the certification process. DESC documents a dedicated operational key ceremony.

3.2.4 Non-Verified Subscriber Information

All fields constituting the subscriber information written in the certificate are verified by DESC RA team.

3.2.5 Validation of Authority

Starting 12th October 2023, this CA is not going to issue end-entity certificates. However the CA services will be kept running to only maintain validation information and support revocation of Timestamping certificates issued on and before 5 May 2021.

3.2.6 Criteria for Interoperation

No stipulation — this section is intentionally left blank.

3.3 Identification and Authentication for Re-keying Requests

3.3.1 Identification and Authentication for Routine Re-Keying

Identification and authentication for re-keying is performed as in initial registration.

3.3.2 Identification and Authentication for Re-Key After Revocation

Identification and authentication for re-keying after revocation is performed as in initial registration.

3.4 Identification and Authentication for Revocation Requests

For certificates issued to OCSP and TSA: certificates revocation shall be conducted as part of DESC internal processes and shall be approved by the Dubai PKI PA.

Once the revocation request is successfully authenticated, DESC RA revokes the subject certificate through the relevant RA system.

4. Certificate Life Cycle Management

4.1 Certificate Application

4.1.1 Who can Submit a Certificate Application

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.1.2 Enrolment Process and Responsibilities

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.1.3 Identification and Authentication for Routine Re-Keying

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.2 Certificate Application Processing

4.2.1 Performing Identification and Authentication Functions

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.2.2 Approval or Rejection of Certificate Applications

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.2.3 Time to Process Certificate Applications

No stipulation — this section is intentionally left blank.

4.3 Certificate Issuance

4.3.1 CA Actions During Certificate Issuance

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.3.2 Notification to Subscriber by the CA of Issuance of Certificate

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.4 Certificate Acceptance

4.4.1 Conduct Constituting Certificate Acceptance

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.4.2 Publication of the Certificate by the CA

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.4.3 Notification of Certificate Issuance by the CA to Other Entities

No stipulation — this section is intentionally left blank.

4.5 Key Pair and Certificate Usage

4.5.1 Subscriber Private Key and Certificate Usage

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.5.2 Relying Party Public Key and Certificate Usage

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.6 Certificate Renewal

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.6.1 Circumstance for certificate renewal

Not applicable.

4.6.2 Who may request renewal

Not applicable.

4.6.3 Processing certificate renewal requests

Not applicable.

4.6.4 Notification of new certificate issuance to subscriber

Not applicable.

4.6.5 Conduct constituting acceptance of a renewal certificate

Not applicable.

4.6.6 Publication of the renewal certificate by the CA

Not applicable.

4.6.7 Notification of certificate issuance by the CA to other entities

Not applicable.

4.7 Certificate Re-Key

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.7.1 Circumstance for Certificate Re-key

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.7.2 Who May Request Certification of a New Public Key

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.7.3 Processing Certificate Re-Keying Requests

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.7.4 Notification of New Certificate Issuance to Subscriber

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.7.5 Conduct Constituting Acceptance of a Re-Keyed Certificate

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.7.6 Publication of the Re-keyed Certificate by the CA

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.7.7 Notification of Certificate Issuance by the CA to Other Entities

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.8 Certificate Modification

4.8.1 Circumstance for certificate modification

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.8.2 Who may request certificate modification

Not applicable. Refer to section 4.8.1.

4.8.3 Processing certificate modification requests

Not applicable. Refer to section 4.8.1.

4.8.4 Notification of new certificate issuance to subscriber

As per initial certificate issuance.

4.8.5 Conduct constituting acceptance of modified certificate

Not applicable. Refer to section 4.8.1.

4.8.6 Publication of the modified certificate by the CA

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.8.7 Notification of certificate issuance by the CA to other entities

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.9 Certificate Revocation and Suspension

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.9.1 Circumstances for Revocation

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.9.2 Who can Request Revocation

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.9.3 Procedure for Revocation Request

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.9.4 Revocation Request Grace Period

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.9.5 Revocation Request Response Time

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.9.6 Revocation Checking Requirement for Relying Parties

The Devices CA provides revocation information to relying parties through CRLs published on a publicly available web server and through its publicly available OCSP responder.

Certificates issued by this CA (except OCSP certificates) include the name of the web-based distribution point and OCSP responder link from where a relying party could get revocation information. It is the relying party's obligation to retrieve and process the most up-to-date revocation information.

4.9.7 CRL Issuance Frequency

As part of the decommissioning process, a long-validity CRL has been issued by the Devices CA.

This CRL remains valid until the expiry of the corresponding CA certificate, as specified in the publicly published Decommissioning Notice. No further CRL issuance is performed following CA termination.

4.9.8 Maximum Latency for CRLs

Refer to section 4.9.7.

4.9.9 Online Revocation/Status Checking Availability

Online certificate status checking for certificates historically issued by the Devices CA is provided via a delegated OCSP responder.

The OCSP responder certificate has been issued with a validity period extending until the expiry of the corresponding Devices CA certificate.

Following CA termination, OCSP responses are generated using the delegated OCSP signing key, and no CA signing operations are performed.

4.9.10 Online Revocation Checking Requirements

The Devices CA OCSP responder supports both HTTP GET and HTTP POST methods.

The Devices CA OCSP responder's responses define value in the nextUpdate field which is not more than 8 hours after the thisUpdate field.

If the OCSP responder receives a request for the status of a certificate serial number that is "unused" (i.e. not issued by) the Devices CA, then the OCSP responder responds with a "revoked" status as defined by RFC 6960.

4.9.11 Other Forms of Revocation Advertisements Available

The Devices CA only uses OCSP and CRL as methods for publishing certificate revocation information.

4.9.12 Special Requirements — Key Compromise

No stipulation.

The Devices CA has been decommissioned.

4.9.13 Circumstances for Suspension

No stipulation.

The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations.

4.9.14 Who Can Request Suspension

Not applicable.

4.9.15 Procedure for Suspension Request

Not applicable.

4.9.16 Limits on Suspension Period

Not applicable.

4.10 Certificate Status Services

Refer to Section 4.9.6 of this document. In addition, the following provisions are made.

Note: As stated in Section 1 of this CPS, The Devices CA has been decommissioned and does not perform certificate issuance, renewal, re-key, or revocation operations. Section 4.10 applies to the continued operation of certificate status information services (including CRL and OCSP) provided by the Devices CA in support of certificates issued prior to cessation of issuance. All requirements defined in this section remain fully applicable for as long as such services are provided, in accordance with the publicly published Decommissioning Notice.

4.10.1 Operational Characteristics

CRLs are published by this CA on a public repository which is available to relying parties through HTTP interface (an HTTP URL of the CRL distribution point is included in the certificate's CDP extension).

The Devices CA OCSP responder exposes an HTTP interface accessible to relying parties. It provides revocation information as below:

- it supports real-time revocation status i.e. for every revocation performed by this CA, revocation information is available to the OCSP service immediately
- responses define value in the nextUpdate field which is not more than 8 hours after the thisUpdate field
- the value in the nextUpdate field always before or equal to the notAfter date of all certificates included within the BasicOCSPResponse.certs field, or if the certs field is omitted, before or equal to the notAfter date of the CA certificate which issued the certificate that the BasicOCSPResponse is for.

4.10.2 Service Availability

Certificate status information services for the Devices CA, including CRL distribution and OCSP responses, remain available after CA termination in accordance with the Decommissioning Notice.

Such availability is provided through previously issued long-validity artifacts and delegated credentials and does not imply continued operation of the CA or retention of the CA signing key

4.10.3 Optional Features

No stipulation — this section is intentionally left blank.

4.11 End of Subscription

No stipulation — this section is intentionally left blank.

4.12 Key Escrow and Recovery

Key escrow and recovery are not supported by this CA.

4.12.1 Key Escrow and Recovery Policy and Practices

Key escrow is not supported by this CA.

4.12.2 Session Key Encapsulation and Recovery Policy and Practices

Not applicable.

5. Facility, Management and Operational Controls

Facility, Management, and Operational Controls described in this section continue to apply to systems and records retained following cessation of certificate issuance and operational decommissioning of the CA, solely for the purposes of auditability, record retention, and integrity of published certificate status information.

5.1 Physical Controls

5.1.1 Site Location and Construction

All critical components of the PKI system are housed within a highly secure enclave within a secure Data Center premises. Physical access controls are in place to protect the infrastructure, management systems and related operational activities of the PKI solution.

5.1.2 Physical Access

Physical security controls include security guard-controlled building access, biometric access, and Closed-Circuit TV (CCTV) monitoring. These physicals controls protect the hardware and software from unauthorized access, furthermore these controls are be monitored on a 24x7x365 basis.

The Dubai PKI systems are protected by six tiers of physical security, with access to the lower tier required before gaining access to the higher most restrictive tier. Sensitive CA operational activities related to the lifecycle of the certification process such as authentication, verification, and issuance, occur within very restrictive physical tiers. Physical access is enforced through the use of two factor biometric authentication. Further, access to the enclave where the Dubai PKI systems are hosted is enabled only if two trusted employees are present to open the enclave's door.

Unauthorized personnel, including un-trusted or third-party employees or visitors, are not allowed into such secured areas without a prior approval and without an escort from one of trusted employees. Similar restrictions exist for the Disaster Recovery site.

All the Networking and systems components including the certification components are located in secure Data cabinets with locks from both sides. To prevent tampering, cryptographic hardware is stored in the most secure area, with access limited to authorized personnel.

5.1.3 Power and air conditioning

The secure enclave is furnished with an Uninterruptible Power Supply (UPS), and heating ventilating and air conditioning (HVAC) sufficient to maintain the computer equipment within the manufacturers recommended range of operating temperatures and humidity.

5.1.4 Water Exposures

The data centers hosting the PKI systems are implementing reasonable precautions to minimize impact of water exposure. These include installing the PKI equipment on elevated floors with moisture detectors.

5.1.5 Fire Prevention and Protection

The secure enclave is protected from fire, heat with a smoke detection equipment monitored on a 24*7*365. Fire suppression equipment are installed within the enclave.

5.1.6 Media Storage

Electronic optical and other media must be stored so as to protect it from accidental damage (water, fire, electromagnetic). Media that contains security audit archive and backup information must be stored in a secure fire-protected safe while within the enclave.

5.1.7 Waste Disposal

All obsolete paper, magnetic media, optical media, etc., created within the enclave, must be shredded before discarding. Reusable magnetic and optical media may be reused indefinitely within the enclave but must be properly wiped and/or destroyed depending on the confidentiality of the data stored on the medium.

5.1.8 Offsite Backup

Backups taken from the Dubai PKI systems provide sufficient recovery information to allow the recovery from system failure(s). Backups are made on a daily basis and copies are transferred to a secure offsite location on regular basis.

Facilities used for offsite backup and archives shall have the same level of security as the DESC's main site.

5.2 Procedural Controls

DESC follows personnel and management practices that provide reasonable assurance of the trustworthiness and competence of the members of the staff and of the satisfactory performance of their duties in the fields of electronic signature-related technologies.

DESC obtains a signed statement from each member of the staff concerned on not having conflicting interests with the Devices CA activities, maintaining confidentiality and protecting personal data.

5.2.1 Trusted Roles

All members of the staff operating the key management operations, administrators, security officers, and system auditors or any other operations that materially affect such operations are considered as serving in a trusted position (i.e., trusted operatives). The following are the trusted roles for a Devices CA:

- PKI Director
- PKI Deputy Director
- PKI Operation Manager
- Key Custodians
- Chief Information Security Officer (CISO)
- Registration Authority (RA) officer
- PKI operations manager

- PKI administrator
- System administrator
- PKI operator
- System administrator

DESC conducts an initial investigation of all members of staff who are candidates to serve in trusted roles to ensure their trustworthiness and competence. Trusted roles individuals must go through an annual background checks.

5.2.2 Number of Persons Required per Task

DESC maintains and enforces rigorous control procedures to ensure the segregation of duties, based on job responsibility, in order to prevent single trusted personnel to perform sensitive operations.

The most sensitive tasks such as the following require the involvement of two or more persons:

- physical access to the secure enclave where the CA systems are hosted,
- access to and management of CA cryptographic hardware security module (HSM),
- validate and authorize the issuance of end-entity certificates. This is enforced during the certificate application processing where an RA officer review and verify all the Applicant information and a second RA officer reviews and finally cross sign the application to get it approved.

All operational activities performed by the personnel having trusted roles are logged and maintained in a verifiable and secure audit trail.

5.2.3 Identification and Authentication for Each Role

Before carrying out the responsibilities of a trusted role:

- DESC confirms the identity of the employee by carrying out background checks,
- DESC issues access credentials to the individual who needs to access equipment located in the secure enclave,
- DESC provides the required dedicated credentials that allow designated individuals to conduct their functions.

5.2.4 Roles Requiring Separation of Duties

DESC ensures separation among the following discreet work groups:

- Personnel managing operations on certificates,
- Administrative personnel who operate the supporting platform,
- Security personnel who enforce security measures.

5.3 Personnel Controls

DESC ensures implementation of security controls with regard to the duties and performance of the members of its staff with regards to the Devices CA activities. These security controls are documented in an internal confidential policy and include the areas below.

5.3.1 Qualifications Experience and Clearance Requirements

Prior to the commencement of employment of a DESC PKI personnel, whether as an employee, agent, or an independent contractor, DESC ensures that checks are performed to establish the background, qualifications and experience needed to perform within the competence context of the specific job. Such checks include:

1. Verify the Identity of Such Person: Verification of identity MUST be performed through:
 - A. The personal (physical) presence of such person before trusted persons who perform human resource or security functions, and
 - B. The verification of well-recognized forms of government-issued photo identification (e.g., Emirates ID); and
2. Verify the Trustworthiness of Such Person: Verification of trustworthiness includes background checks, which address at least the following, or their equivalent:
 - A. Criminal convictions for serious crimes,
 - B. Misrepresentations by the candidate,
 - C. Appropriateness of references,
 - D. Any clearances as deemed appropriate.

5.3.2 Background Check Procedures

DESC conducts background investigations for all DESC PKI personnel, contractors, trusted roles and management positions. Additionally, DESC PKI staff who have Trusted roles go through an annual background check to ensure continuous trustworthiness of those employees.

5.3.3 Training Requirements

DESC makes available relevant technical training for their personnel to perform their functions.

For personnel performing information verification and vetting (i.e., RA officers), public key infrastructure topics, authentication and vetting policies and procedures, applicable CP and CPS material and common threats to the information verification process are included.

The required skills and knowledge for validation specialists are tested through an examination on the information verification requirements outlined in the Baseline Requirements.

5.3.4 Retraining Frequency and Requirements

The training content is reviewed and amended on a yearly basis to reflect latest leading practices, CA configuration changes and relevant updates on applicable requirements.

5.3.5 Job Rotation Frequency and Sequence

The Dubai PKI PA ensures that any change or rotation in staff shall not affect the operational effectiveness, continuity and integrity of the Devices CA services.

5.3.6 Sanctions for Unauthorized Actions

DESC sanctions personnel for unauthorized actions, unauthorized use of authority and unauthorized use of systems for the purpose of imposing accountability on the Dubai PKI personnel, as it might be appropriate under the circumstances and as per the prevailing HR policy and the applicable Dubai law.

5.3.7 Independent Contractor Requirements

Independent subcontractors and their personnel are subject to the same background checks as DESC employees. The background checks include:

- Criminal convictions for serious crimes
- Misrepresentations by the candidate
- Appropriateness of references
- Any clearances as deemed appropriate
- Privacy protection
- Confidentiality conditions

5.3.8 Documentation Supplied to Personnel

DESC makes available documentation to personnel during initial training and retraining.

5.4 Audit Logging Procedures

5.4.1 Types of Event Recorded

Audit logging procedures include event logging and systems auditing, implemented for the purpose of maintaining a secure environment. At a minimum, each audit record includes the following:

- The date and time the event occurred
- A success or failure indicator of the event (e.g. CA signing event, revocation event, certificate validation event) ,
- The identity of the entity and/or operator that caused the event,
- Description of the event.

DESC ensures that at least the following details are recorded:

- CA key lifecycle management events, including:
 - Key generation, backup, storage, recovery, archival, and destruction,
 - Cryptographic device lifecycle management events.
- CA and subscriber certificate lifecycle management events, including:
 - Introduction of new Certificate Profiles and retirement of existing Certificate Profiles,
 - Certificate requests, re-key requests, and revocation,
 - All verification activities stipulated in these requirements and the CA's Certification Practice Statement,
 - Date, time, phone number used, persons spoken to, and end results of verification telephone calls,
 - Acceptance and rejection of certificate requests
 - Issuance of Certificates,
 - Generation of Certificate Revocation Lists and OCSP entries.

Dubai PKI - Devices CA
Certificate Practice Statement

- Security events, including:
 - Successful and unsuccessful PKI system access attempts,
 - PKI and security system actions performed,
 - Security profile changes,
 - System crashes, hardware failures and other anomalies,
 - Firewall and router activities,
 - Entries to and exits from the CA facility.

In addition, DESC maintains internal logs and audit trails of relevant operational events in the infrastructure, including, but not limited to:

- Start and stop of servers,
- Outages and major problems,
- Physical access of personnel and other persons to sensitive parts of DESC site,
- Backup and restore,
- Report of disaster recovery tests,
- Audit inspections,
- Upgrades and changes to systems, software and infrastructure,
- Security intrusions and attempts at intrusion,
 - System configuration changes and maintenance, as defined in the CPS,
 - CA personnel changes,
 - Discrepancy and compromise reports,
 - Information concerning the destruction of sensitive information,
 - Current and past versions of all Certificate Policies,
 - Current and past versions of Certification Practice Statements,
 - Vulnerability Assessment Reports,
 - Threat and Risk Assessment Reports,
 - Compliance Inspection Reports,
 - Current and past versions of Agreements,
- Other documents that are required for audits include:
 - Infrastructure plans and descriptions,
 - Physical site plans and descriptions,
 - Configuration of hardware and software,
 - Personnel access control lists.

Following the decommissioning of the Devices CA, audit logging activities are limited to events related to the continued operation of certificate status information services (including CRL and OCSP), repository publication, and archival access.

No audit events related to certificate issuance, renewal, re-key, or revocation are generated after decommissioning, as such CA operations are no longer performed.

Audit logs generated prior to decommissioning remain protected and retained in accordance with the archival requirements set forth in Section 5.5 of this CPS and applicable regulatory requirements.

5.4.2 Frequency of Processing Log

DESC ensures that designated personnel reviews log files at regular intervals to validate log integrity and ensure timely identification of anomalous events.

Designated personnel must report and perform follow-up of these events and any issues affecting audit log integrity as per the following audit log review cycle:

- On a monthly basis, the PKI operations management reviews the CA applications and security logs to validate the integrity of the logging processes and to test/confirm the daily monitoring function is being operated properly,
- On a quarterly basis, the PKI operation management reviews the physical access logs and the user management on the CA systems with an objective to continuously validate the ongoing physical and logical access policies,
- Evidence of audit log reviews, outcome of the review process, and executed remediation actions are collected and archived for inspection by authorized DESC personnel.

5.4.3 Retention Period for Audit Log

The audit logs are retained for at least two years:

- CA certificate and key lifecycle management event records (as set forth in Section 5.4.1) after the later occurrence of:
 - destruction of the CA Private Key; or
 - revocation or expiration of the CA certificate.
- Subscriber Certificate lifecycle management event records (as set forth in Section 5.4.1) after the revocation or expiration of the Subscriber Certificate;
- Any security event records (as set forth in Section 5.4.1) after the event occurred.

These may be made available to auditors upon request.

5.4.4 Protection of Audit Log

Audit logs shall be protected by a combination of physical and procedural security controls, this includes:

- The CA generates a message authentication code for each audit log file it keeps,
- The security of audits logs is maintained while these logs transit by the backup system and when these logs are archived,
- Only authorized roles can obtain access to systems where audit logs are stored and any attempts to tamper with audit logs can be tracked to the respective trusted operative personnel.

5.4.5 Audit Log Backup Procedures

The following rules apply for the backup of the Devices CA audit log:

- Backup media shall be stored locally in DESC's main site in a secure location,

- A second copy of the audit log data and files shall be stored outside DESC's main site, in a site that provides similar physical and environmental security as the main site.

5.4.6 Audit Collection System (Internal vs. External)

Automatic audit processes are initiated at system startup and end at system shutdown. If an automated audit system fails and the integrity of the system or confidentiality of the information protected by the system is at risk, DESC determines whether to suspend the CA's or RA's operations until the problem is fixed.

5.4.7 Notification to Event-Causing Subject

Where an event is logged by the audit collection system, no notice is required to be given to the individual, organization, device or application that caused the event.

5.4.8 Vulnerability Assessments

DESC conducts an annual Risk Assessment that:

1. Identifies foreseeable internal and external threats that could result in unauthorized access, disclosure, misuse, alteration, or destruction of any Certificate Data or Certificate Management Processes,
2. Assesses the likelihood and potential damage of these threats, taking into consideration the sensitivity of the Certificate Data and Certificate Management Processes, and
3. Assesses the sufficiency of the policies, procedures, information systems, technology, and other arrangements that DESC has in place to counter such threats.

DESC also performs regular vulnerability assessment and penetration testing covering the Dubai PKI systems. Assessments focus on internal and external threats that could result in unauthorized access, tampering, modification, alteration, or destruction of the certificate issuance process. Evidence of the vulnerability assessment and penetration testing activities' execution are collected and archived by the Dubai PKI PA Information Security function.

5.5 Records Archival

5.5.1 Types of Records Archived

DESC archives the audit logs set forth in Section 5.4.1, in addition to the following:

1. Documentation related to the security of their Certificate Systems, Certificate Management Systems, and Root CA Systems; and
2. Documentation related to their verification, issuance, and revocation of certificate requests and Certificates.

5.5.2 Retention Period for Archive

DESC retains audit logs (as set forth in Section 5.4.1) and records (as set forth in Section 5.5.1) for 7 years after any certificate based on that documentation/logs ceases to be valid.

5.5.3 Protection of Archive

Records are archived in such a way that they cannot be deleted or destroyed. Controls are in place to ensure that only authorized personnel are able to manage the archive without modifying integrity, authenticity and confidentiality of the contained records.

5.5.4 Archive Backup Procedures

The PKI operations team use backup, restore and archive procedures that document how the archive information is created, transmitted and stored.

5.5.5 Requirements for Time stamping of Records

All recorded events include the date and time of when the event took place, based on the time of the operating system. Procedures are in place to ensure that all systems rely on and are synchronized with a trusted time source.

5.5.6 Archive Collection System (Internal or External)

Only authorized and authenticated staff is allowed to handle archived material.

5.5.7 Procedures to Obtain and Verify Archive Information

Only DESC staff members with a clear hierarchical control and a definite job description may obtain and verify archived information. DESC retains records in electronic or paper-based format.

5.6 Key Changeover

To minimize impact of key compromise, Devices CA private key is periodically changed over as specified in section 6.3.2.

To support revocation management of issued certificate, the old CA private keys are maintained until such time as all relying certificates have expired.

5.7 Compromise and Disaster Recovery

5.7.1 Incident and Compromise Handling Procedures

If DESC detects a potential hacking attempt or other form of compromise to the CA, it shall perform an investigation to determine the nature and the degree of damage. If the CA Private key is suspected of compromise, the procedures outlined in DESC's Business continuity and disaster recovery plan shall be followed. Otherwise, the scope of potential damage shall be assessed to determine if the CA needs to be rebuilt, only some certificates need to be revoked, and/or the CA key needs to be declared compromised. DESC also specifies applicable compromise reporting and relevant communications as part of the Business continuity and disaster recovery plan.

Apart from the circumstance of key compromise, DESC specifies the recovery procedures used when computing resources, software, and/or data are corrupted or suspected of being corrupted.

5.7.2 Computing Resources, Software Data Corruption

Participants (other than Subscribers and Relying Parties), establish the necessary measures to ensure full recovery of Devices CA services in case of a disaster, and corrupted servers, software or data.

DESC establishes:

- Disaster recovery resources in a location sufficiently distant from the regular DESC Subordinate CAs operation facility,
- Fast communications between the two sites to ensure data integrity.

Disaster recovery infrastructure and procedures shall be fully tested at least once a year with more than one member of the Dubai PKI PA as the witness.

5.7.3 Entity Private Key Compromise Procedures

For Subscribers key compromise, see Section 4.9 of the present CPS.

In the event of a key compromise of the Devices CA, or of the associated activation data, DESC triggers the Key compromise and CA termination plans detailed as part of DESC Business continuity and disaster recovery plan.

As part of the Key compromise and CA termination plan, the Dubai PKI PA will be invited for an emergency meeting to take decisions and handle communications as required with law enforcement authorities and other relevant stakeholders such as Root Programs and Relying Parties.

5.7.4 Business Continuity Capabilities After a Disaster

DESC establishes the necessary measures to full and automatic recovery of the online services such as the OCSP and the public repository hosting CRLs in case of a disaster, in addition to corrupted servers, software or data.

DESC establishes the necessary measures to ensure full recovery of the offline services service in case of a disaster, and corrupted servers, software or data.

Failover scenarios to the Devices CA disaster recovery location are made possible considering the Devices CA backup system that enables the continuous replication of critical Devices CA data from the primary site to the disaster recovery site.

A **Business Continuity Plan** has been implemented to ensure business continuity following a natural or other disaster and is available as a separate internal document. The business continuity plan includes the following:

1. Conditions for activating the plan,
2. Emergency procedures,
3. Fallback procedures,
4. Resumption procedures,
5. Maintenance schedule for the plan,
6. Awareness and education requirements,
7. The responsibilities of the individuals,
8. Recovery time objective (RTO),
9. Regular testing of contingency plans,
10. Plan to maintain or restore the business operations in a timely manner following interruption to or failure of critical business processes,
11. A requirement to store critical cryptographic materials (i.e., secure cryptographic device and activation materials) at an alternate location,

12. What constitutes an acceptable system outage and recovery time,
13. How frequently backup copies of essential business information and software are taken,
14. The distance of recovery facilities to the main site,
15. Procedures for securing its facility to the extent possible during the period of time following a disaster and prior to restoring a secure environment either at the original or a remote site.

5.8 CA or RA Termination

Upon termination of the Devices CA, the CA signing key pair shall be securely destroyed in accordance with the CA key destruction procedures defined in this CPS and the Dubai PKI Key Management and Procedures.

Prior to key destruction, the CA shall issue any final revocation and status information artifacts required to support relying party validation, including a long-validity CRL and delegated OCSP responder certificates, as applicable.

Following termination, no CA operations shall be performed. The continued availability of certificate status information (CRL and OCSP) shall be provided solely through previously issued artifacts, as specified in the publicly published Decommissioning Notice.

6. Technical Security

Controls

6.1 Key Pair Generation

The requirements for key generation and delivery are stated in the following sections.

6.1.1 Key Pair Generation

6.1.1.1 CA Key Pair Generation

No new CA key pairs shall be generated for this CA. All CA key generation activities have been completed prior to the cessation of certificate issuance.

Any key generation activities described in this section are **not applicable** following the issuance of the final CRL(s) and delegated OCSP responder certificate(s).

6.1.1.2 Subscriber Key Pair Generation

The Devices CA does not perform Subscriber key generation.

Subscribers shall generate their keys as per the below table:

Certificate Type	Key generation requirements
OCSP certificates	Key generation is done using a dedicated OCSP key management utility. The OCSP key pair is generated inside the memory of a FIPS 140-1 level 3 hardware security module

6.1.2 Private Key Delivery to Subscriber

[Deprecated – Not Applicable]

This CA no longer performs CA key generation activities..

6.1.3 Public Key Delivery to Certificate Issuer

[Deprecated – Not Applicable]

This CA no longer performs CA key generation activities.

6.1.4 CA Public Key Delivery to Relying Parties

The certificates of the Devices CA remains archived and publicly available for verification and historical reference purposes.

6.1.5 Key Sizes

[Deprecated – Not Applicable]

This CA no longer performs CA key generation activities.

6.1.6 Public Key Parameters Generation and Quality Checking

[Deprecated – Not Applicable]

This CA no longer performs CA key generation activities.

6.1.7 Key Usage Purposes (As per X.509 v3 Key Usage Field)

[Deprecated – Not Applicable]

This CA no longer performs CA key generation activities.

6.2 Private Key Protection and Cryptographic Module Engineering Controls

The private key of the Devices CA was generated, protected, and managed in accordance with this CPS during its active issuance period.

Following the issuance of the final CRL(s) and delegated OCSP responder certificate(s), the CA private key was securely destroyed in accordance with documented key destruction procedures

6.2.1 Cryptographic Module Standards and Controls

During its active operational period, the Devices CA private keys were generated and protected within cryptographic modules meeting the requirements defined in this CPS.

No cryptographic module retains an active CA private key following key destruction.

6.2.2 Private key (n out of m) multi-person control

[Deprecated – Not Applicable]

CA private key material is no longer retained following secure key destruction.

6.2.3 Private Key Escrow

Not applicable.

6.2.4 Private Key Backup

[Deprecated – Not Applicable]

CA private key material is no longer retained following secure key destruction.

6.2.5 Private Key Archival

No stipulation — this section is intentionally left blank.

6.2.6 Private Key Transfer Into or From a Cryptographic Module

[Deprecated – Not Applicable]

CA private key material is no longer retained following secure key destruction.

6.2.7 Private Key Storage on Cryptographic Module

[Deprecated – Not Applicable]

CA private key material is no longer retained following secure key destruction.

6.2.8 Method of Activating Private Key

[Deprecated – Not Applicable]

CA private key material is no longer retained following secure key destruction.

6.2.9 Method of Deactivating Private Key

[Deprecated – Not Applicable]

CA private key material is no longer retained following secure key destruction.

6.2.10 Method of Destroying Private Key

The CA private keys were securely destroyed following the issuance of the final CRL(s) and delegated OCSP responder certificate(s).

Key destruction was performed using documented and auditable procedures ensuring that recovery of the private keys is not possible.

6.2.11 Cryptographic Module Rating

During its active operational period, the Devices CA private keys were generated and protected within cryptographic modules meeting the requirements defined in this CPS.

No cryptographic module retains an active CA private keys following key destruction.

6.3 Other Aspects of Key Pair Management

6.3.1 Public Key Archival

The public keys of the Devices CA remains archived and publicly available for verification and historical reference purposes.

6.3.2 Certificate Operational Periods and Key Pair Usage Periods

No new certificates are issued by this CA.

Certificate operational periods are limited to previously issued certificates and delegated validation credentials, as documented in the public Decommissioning Notice.

6.4 Activation Data

6.4.1 Activation Data Generation and Installation

[Deprecated – Not Applicable]

No CA private key activation data exists following key destruction.

6.4.2 Activation Data Protection

[Deprecated – Not Applicable]

No CA private key activation data exists following key destruction.

6.4.3 Other Aspects of Activation Data

No stipulation — this section is intentionally left blank.

6.5 Computer Security Controls

Systems supporting certificate status services (CRL and OCSP) remain protected in accordance with DESC security controls. These systems do not host or process CA private keys.

6.5.1 Specific Computer Security Technical Requirements

The Devices CA shall be operated according to the following security controls:

- Physical access control to the CA servers shall be enforced,
- Separation of duties and dual controls for CA-sensitive operations,
- Identification and authentication of PKI roles and their associated identities,
- Archival of CA's history and audit data,
- Audit of security related events,
- Automatic and regular validation of the CA systems' integrity,
- Recovery mechanisms for keys and CA systems,
- Hardening CA servers operating system according to best practices and PKI vendor requirements,
- Network protection, including intrusion detection systems,
- Proactive patch management for the CA systems,
- Multi-factor authentication for all accounts capable of directly causing certificate issuance.

6.5.2 Computer Security Rating

No stipulation — this section intentionally left blank.

6.6 Life Cycle Technical Controls

Life cycle technical controls apply only to systems supporting certificate status publication and validation services.

CA issuance systems are no longer operational.

6.6.1 System Development Controls

Purchased hardware or software shall be shipped or delivered in a sealed, tamper-proof container and be installed by trained and trusted personnel. Hardware and software updates shall be handled in the same manner as the original equipment.

The hardware and software are dedicated to performing CA activities. There are no other applications, hardware devices, network connections, or component software installed which are not part of the CA operations.

The CA hardware or software shall be tested, deployed and configured in accordance with industry best practices and vendor recommendations. All changes are controlled through the Dubai PKI change management processes.

6.6.2 Security Management Controls

The hardware and software used to set up the Dubai PKI shall be dedicated to performing only CA-related tasks. There shall be no other applications, hardware devices, network connections or component software, which are not part of the Dubai PKI, connected to or installed on CA hardware.

A change management process is enforced to ensure that the CA systems configuration, modification and upgrades are documented and controlled by the PKI operations management.

A vulnerability management process is enforced to ensure that the CA systems are scanned for malicious code on first use and periodically thereafter. The vulnerability management process supports the processing within 96 hours of discovery of critical vulnerabilities not previously met by the PKI operations team.

6.6.3 Life Cycle Security Controls

No stipulation — this section is intentionally left blank.

6.7 Network Security Controls

DESC ensures maintenance of network security, including managed firewalls and intrusion detection systems.

The network is segmented into several zones, based on their functional, logical and physical relationship. Network boundaries are applied to limit the communication between systems (within zones) and communication between zones, with rules that support only the services, protocols, ports, and communications that the CA has identified as necessary to its operations, disabling all accounts, applications, services, protocols, and ports that are not used in the CA's operations.

Network security controls remain in place to protect certificate status services (CRL and OCSP).

No network paths exist that permit CA signing operations.

6.8 Time Stamping

[Not Applicable].

7. Certificate, CRL and OCSP Profiles

7.1 Certificate Profile

The Devices CA meets the technical requirements set forth in Section 2.2 – Publication of Information, Section 6.1.5 – Key Sizes, and Section 6.1.6 – Public Key Parameters Generation and Quality Checking of the CA/Browser Baseline Requirements.

The Devices CA generates non-sequential Certificate serial numbers greater than zero (0) containing at least 64 bits of output from a CSPRNG.

7.1.1 Version Number

This CA issues X.509 version 3 certificates as defined in RFC 5280.

7.1.2 Certificate Extensions

X.509 v3 extensions are supported and used in alignment with the CA/B Forum Baseline Requirements section 7.1. Refer to sections 7.1.10 -7.1.13 of this CPS for the details of the contents of the certificates issued by the Devices CA.

7.1.3 Algorithm Object Identifiers

X.509v3 standard OIDs is used. Algorithm must be RSA encryption for the subject key and SHA256withRSA encryption for the certificate signature.

7.1.4 Name Forms

As per the naming conventions and constraints listed in Section 3.1.1 of this CPS, that is followed while defining the certificate profiles in sections 7.1.10 -7.1.13 of this CPS.

The certificate subject attributes shall not contain values as meta data of period, hyphen, empty space, etc (Eg: '.' OR '-' OR ' ') indicating the attribute as blank or not applicable.

The subjectAltName extension shall not contain underscore characters (“_”) in dNSName entries.

7.1.5 Name Constraints

Name constraints extension is not supported.

7.1.6 Certificate Policy Object Identifier

The Devices CA uses certificate policy object identifiers that are defined as part of OID scheme for the Dubai PKI. Refer to sections 7.1.10 - 7.1.13 of this CPS for the profiles of the certificates issued by the Devices CA including the values of the OID identifiers.

7.1.7 Usage of Policy Constraints Extension

Policy constraints extension is not supported.

7.1.8 Policy Qualifiers Syntax and Semantics

The use of policy qualifiers as per the RFC 5280 is supported. Refer to sections 7.1.10 - 7.1.13 of this CPS for the profiles of the certificates issued by the Devices CA including the used policy qualifiers.

7.1.9 Processing Semantics for Critical Certificate Extensions

Processing of certificate policies extensions shall conform with the RFC 5280.

7.1.10 Devices Certificate Profile (Deprecated)

This is the complete ASN1 description of the devices certificate.

Field	CE ¹	O/M ²	CO ³	Value	Comment
Certificate		M			
TBSCertificate		M	D		See 4.1.2 of RFC 3280
Signature	False	M			
algorithm		M	S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
signatureValue		M	D	Devices CA Signature	CA signature value
TBSCertificate					
Version	False				
		M	S	2	Version 3
SerialNumber	False				
certificateSerialNumber		M	D		At least 64 bits of entropy Validated on duplicates.
Signature	False	M			
algorithm		M	S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
Issuer	False	M	S		
countryName		M	S	AE	Encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)

¹ CE = Critical Extension.

² O/M: O = Optional, M = Mandatory.

³ CO = Content: S = Static, D = Dynamic

Dubai PKI - Devices CA
Certificate Practice Statement

	organizationName		M	S	UAE Government	UTF8 encoded
	commonName		M	S	Devices Certification Authority	UTF8 encoded
Validity		False	M			Implementations MUST specify using UTC time until 2049 from then on using Generalized Time
	NotBefore		M	D	Certificate generation process date/time.	
	NotAfter		M	D	Certificate generation process date/time + not more than [36] Months	
Subject		False	M			
	countryName		M	S	AE	Will be encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)
	organizationName		M	D	Allocated as per certificate request	UTF8 encoded
	localityName		M/O	D	Allocated as per certificate request however this should be one of the Emirates in UAE	UTF8 encoded. Mandatory if the stateOrProvinceName field is not present, optional if the stateOrProvinceName is present.
	stateOrProvinceName		M/O	D	Allocated as per certificate request however this should be one of the Emirates in UAE	UTF8 encoded. Mandatory if the localityName field is not present, optional if the localityName is present.
	commonName		M	D	System unique common name, unique device identifier or IP address that are applicable	UTF8 encoded
subjectPublicKeyInfo		False	M			
	Algorithm		M	D	RSA/ECDSA	
	subjectPublicKey		M	D	Public Key length: 2048 or 4096	

Dubai PKI - Devices CA
Certificate Practice Statement

					(RSA)/256 or 384 (ECDSA)	
Extensions			M			
Authority Properties						
authorityKeyIdentifier		False	M			
	keyIdentifier		M	D	SHA-1 Hash of the devices CA public key	
authorityInfoAccess		False	M			
	accessMethod		M	S	Id-ad-2 1 id-ad-ocsp OID i.e., 1.3.6.1.5.5.7.48.1 (ca ocsp)	OCSP Responder field
	accessLocation		M	S	http://ca- services.desc.gov.ae/a dss/ocsp	OCSP responder URL
	accessMethod		O	S	Id-ad-2 2 id-ad- caIssuers OID i.e. 1.3.6.1.5.5.7.48.2 (ca cert)	CA Issuers field
	accessLocation		O	S	http://ca- repository.desc.gov.ae/ certificate/devices.crt	Devices CA Certificate download URL
cRLDistributionPoints		False	O			
	distributionPoint		O	D	http://ca- repository.desc.gov.ae/ CRL/Devices/devices_ certification_authority_ uae_government_ae_ crlfilec<CRLNumber>. crl	CRL download URL
Subject Properties						
subjectKeyIdentifier		False	M			
	keyIdentifier		M	D	SHA-1 Hash	
Key Usage Properties						
keyUsage		True	M			
	digitalSignature		M	S	True	
	keyEncipherment		M	S	True	Not to be included for ECDSA keys
extendedKeyUsage		False	M			
	clientAuth		M	S	True	

Dubai PKI - Devices CA
Certificate Practice Statement

Certificate Policy Property						
	certificatePolicies	False	M			
	policyIdentifier		M	S	2.16.784.1.2.2.100.1 .2.1.2	
	policyQualifiers:policyQualifierId		M	S	id-qt 1	
	policyQualifiers:qualifier:cPSuri		M	D	URL location of Devices CA's CPS	
	certificatePolicies	False	M			
	policyIdentifier		M	S	2.16.784.1.2.2.100.1.2 .2.3.1	

7.1.11 SSL Certificate Profile (Deprecated)

This is the complete ASN1 description of the SSL certificate.

Field	CE ⁴	O/M ⁵	CO ⁶	Value	Comment
Certificate		M			
TBSCertificate		M	D		See below section for details
Signature	False	M			
algorithm		M	S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
signatureValue		M	D	Devices CA Signature	CA signature value
TBSCertificate					
Version	False				
		M	S	2	Version 3
SerialNumber	False				
certificateSerialNumber		M	D		At least 64 bits of entropy Validated on duplicates
Signature	False	M			
Algorithm		M	S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
Issuer	False	M	S		
countryName		M	S	AE	Encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)
organizationName		M	S	UAE Government	UTF8 encoded
commonName		M	S	Devices Certification Authority	UTF8 encoded
Validity	False	M			Implementations MUST specify using UTC time until 2049 from then on using Generalized Time

⁴ CE = Critical Extension.

⁵ O/M: O = Optional, M = Mandatory.

⁶ CO = Content: S = Static, D = Dynamic

Dubai PKI - Devices CA
Certificate Practice Statement

NotBefore		M	D	Certificate generation process date/time.	
NotAfter		M	D	Certificate generation process date/time + not more than [397] Days	
Subject	False	M			
countryName		M	S	AE	Will be encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)
organizationName		M	D	Allocated as per certificate request	UTF8 encoded
localityName		M/O	D	Allocated as per certificate request however this should be one of the Emirates in UAE	UTF8 encoded. Mandatory if the stateOrProvinceName field is not present, optional if the stateOrProvinceName is present.
stateOrProvinceName		M/O	D	Allocated as per certificate request however this should be one of the Emirates in UAE	UTF8 encoded. Mandatory if the localityName field is not present, optional if the localityName is present.
commonName		M	D	Domain name(s) or public IP address that are applicable, potentially linked to the Subject Alternative Name extension	UTF8 encoded
subjectPublicKeyInfo	False	M			
algorithm		M	D	RSA/ECDSA	
subjectPublicKey		M	D	Public Key length: 2048 or 4096 (RSA)/256 or 384 (ECDSA)	
Extensions		M			
Authority Properties					
authorityKeyIdentifier	False	O			Mandatory in all certificates except

Dubai PKI - Devices CA
Certificate Practice Statement

					for self-signed certificates
keyIdentifier		M	D	SHA-1 Hash of the Devices CA public key	When this extension is used, this field MUST be supported at minimum
authorityInfoAccess	False	M			
accessMethod		M	S	Id-ad-2 1 id-ad-ocsp OID i.e., 1.3.6.1.5.5.7.48.1 (ca ocsp)	OCSP Responder field
accessLocation		M	S	http://ca-services.desc.gov.ae/adss/ocsp	OCSP responder URL
accessMethod		O	S	Id-ad-2 2 id-ad-calssuers OID i.e., 1.3.6.1.5.5.7.48.2 (ca cert)	CA Issuers field
accessLocation		O	S	http://ca-repository.desc.gov.ae/certificate/devices.crt	Devices CA Certificate download URL
cRLDistributionPoints	False	O			
distributionPoint		O	D	http://ca-repository.desc.gov.ae/CRL/Devices/devices_certification_authority_uae_government_ae_crlfilec<CRLNumber>.crl	CRL download URL
Subject Properties					
subjectKeyIdentifier	False	M			
keyIdentifier		M	D	SHA-1 Hash	
subjectAltName	False	M	D	Allocated as per certificate request	Domain name(s) and/or public IP address that are applicable, linked to the subject common name field
Key Usage Properties					
keyUsage	True	M			
digitalSignature		M	S	True	

keyEncipherment		M	S	True	Not to be included for ECDSA keys
extendedKeyUsage	False	M			
serverAuth		M	S	True	
Certificate Policy Property					
certificatePolicies	False	O			
policyIdentifier		M	S	2.16.784.1.2.2.100.1.2.1.2	
policyQualifiers:policyQualifierId		M	S	id-qt 1	
policyQualifiers:qualifier:cPSuri		M	D	URL location of Devices CA's CPS	
certificatePolicies	False	M			
policyIdentifier		M	S	2.16.784.1.2.2.100.1.2.3.2	
certificatePolicies	False	M			
policyIdentifier		M	S	2.23.140.1.2.2	Certificate issued in compliance with the TLS Baseline Requirements – Organization identity asserted

7.1.12 VPN Certificate Profile (Deprecated)

This is the complete ASN1 description of the VPN certificate.

Field	CE ⁷	O/M ⁸	CO ⁹	Value	Comment
Certificate		M			
TBSCertificate		M	D		See below section for details
Signature	False	M			
algorithm		M	S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
signatureValue		M	D	Devices CA Signature	CA signature value
TBSCertificate					
Version	False				
		M	S	2	Version 3
SerialNumber	False				

⁷ CE = Critical Extension.

⁸ O/M: O = Optional, M = Mandatory.

⁹ CO = Content: S = Static, D = Dynamic

Dubai PKI - Devices CA
Certificate Practice Statement

certificateSerialNumber		M	D		At least 64 bits of entropy Validated on duplicates
Signature	False	M			
Algorithm		M	S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
Issuer	False	M	S		
countryName		M	S	AE	Encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)
organizationName		M	S	UAE Government	UTF8 encoded
commonName		M	S	Devices Certification Authority	UTF8 encoded
Validity	False	M			Implementations MUST specify using UTC time until 2049 from then on using Generalized Time
NotBefore		M	D	Certificate generation process date/time.	
NotAfter		M	D	Certificate generation process date/time + not more than [397] Days	
Subject	False	M			
countryName		M	S	AE	Will be encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)
organizationName		M	D	Allocated as per certificate request	UTF8 encoded
localityName		M/O	D	Allocated as per certificate request however this should be one of the Emirates in UAE	UTF8 encoded. Mandatory if the stateOrProvinceName field is not present, optional if the

Dubai PKI - Devices CA
Certificate Practice Statement

						stateOrProvinceName is present.
	stateOrProvinceName		M/O	D	Allocated as per certificate request however this should be one of the Emirates in UAE	UTF8 encoded. Mandatory if the localityName field is not present, optional if the localityName is present.
	commonName		M	D	System unique common name or DNS name or IP address that are applicable, potentially linked to the Subject Alternative Name extension	UTF8 encoded
subjectPublicKeyInfo		False	M			
	algorithm		M	D	RSA/ECDSA	
	subjectPublicKey		M	D	Public Key length: 2048 or 4096 (RSA)/256 or 384 (ECDSA)	
Extensions			M			
Authority Properties						
authorityKeyIdentifier		False	O			Mandatory in all certificates except for self-signed CA certificates
	keyIdentifier		M	D	SHA-1 Hash of the Devices CA public key	When this extension is used, this field MUST be supported at minimum
authorityInfoAccess		False	M			
	accessMethod		M	S	Id-ad-2 1 id-ad-ocsp OID i.e., 1.3.6.1.5.5.7.48.1 (ca ocsp)	OCSP Responder field
	accessLocation		M	S	http://ca-services.desc.gov.ae/ads/ocsp	OCSP responder URL
	accessMethod		O	S	Id-ad-2 2 id-ad-calssuers OID	CA Issuers field

Dubai PKI - Devices CA
Certificate Practice Statement

					i.e.,1.3.6.1.5.5.7.48.2 (ca cert)	
	accessLocation		O	S	http://ca-repository.desc.gov.ae/certificate/devices.crt	Devices CA Certificate download URL
	cRLDistributionPoints	False	O			
	distributionPoint		O	D	http://ca-repository.desc.gov.ae/CRL/Devices/devices_certification_authority_uae_government_ae_crlfilec<CRLNumber>.crl	CRL download URL
Subject Properties						
	subjectKeyIdentifier	False	M			
	keyIdentifier		M	D	SHA-1 Hash	
	subjectAltName	False	M	D	Allocated as per certificate request	Domain name(s) and/or public IP address that are applicable, linked to the subject common name field
Key Usage Properties						
	keyUsage	True	O			
	digitalSignature		M	S	True	
	extendedKeyUsage	False	M			
	serverAuth		M	S	True	
Certificate Policy Property						
	certificatePolicies	False	M			
	policyIdentifier		M	S	2.16.784.1.2.2.100.1.2.1.2	
	policyQualifiers:policyQualifierId		M	S	id-qt 1	
	policyQualifiers:qualifier:cPSuri		M	D	URL location of Devices CA's CPS	

Dubai PKI - Devices CA
Certificate Practice Statement

certificatePolicies	False	M				
policyIdentifier		M	S	2.16.784.1.2.2.100.1.2.2.3.3		
certificatePolicies	False	M				
policyIdentifier		M	S	2.23.140.1.2.2	Certificate issued in compliance with the TLS Baseline Requirements – Organization identity asserted	

7.1.13 TSA Signing Certificate Profile (Deprecated)

This is the complete ASN1 description of the certificate associated to TSA signing private keys. DESC rekeys its TSA certificate every maximum period of 15 months.

Field	CE ¹⁰	O/M ¹¹	CO ¹²	Value	Comment
Certificate		M			
TBSCertificate		M	D		See 4.1.2 of RFC 3280
Signature	False	M			
algorithm		M	S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
signatureValue		M	D	Devices CA Signature	CA signature value
TBSCertificate					
Version	False				
		M	S	2	Version 3
SerialNumber	False				
certificateSerialNumber		M	D		At least 64 bits of entropy Validated on duplicates
Signature	False	M			
algorithm		M	S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
Issuer	False	M	S		
countryName		M	S	AE	Encoded according to "ISO 3166-1-alpha-2 code elements". Printable

¹⁰ CE = Critical Extension.

¹¹ O/M: O = Optional, M = Mandatory.

¹² CO = Content: S = Static, D = Dynamic

Dubai PKI - Devices CA
Certificate Practice Statement

						String, size 2 (rfc5280)
organizationName		M	S	UAE Government		UTF8 encoded
commonName		M	S	Devices Certification Authority		UTF8 encoded
Validity	False	M				Implementations MUST specify using UTC time until 2049 from then on using Generalized Time
NotBefore		M	D	Certificate generation process date/time.		
NotAfter		M	D	Certificate generation process date/time + not more than [60] Months		
Subject	False	M				
countryName		M	S	AE		Will be encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)
organizationName		M	S	DESC		UTF8 encoded
localityName		M	S	Dubai		UTF8 encoded
commonName		M	S	Dubai Timestamping Authority		UTF8 encoded
Subject Public Key Info	False	M				
algorithm		M	S	RSA		
subjectPublicKey		M	S	Key length: 4096 bits (RSA)		
Extensions		M				
Authority Properties						

Dubai PKI - Devices CA
Certificate Practice Statement

authorityKeyIdentifier		False	O			Mandatory in all certificates except for self-signed CA certificates
	keyIdentifier		M	D	SHA-1 Hash of the Devices CA public key	When this extension is used, this field MUST be supported at minimum
authorityInfoAccess		False	M			
	accessMethod		M	S	Id-ad-2 1 id-ad-ocsp OID i.e., 1.3.6.1.5.5.7.48.1 (ca ocsp)	OCSP Responder field
	accessLocation		M	S	http://ca-services.desc.gov.ae/adss/ocsp	OCSP responder URL
	accessMethod		O	S	Id-ad-2 2 id-ad-calssuers OID i.e., 1.3.6.1.5.5.7.48.2 (ca cert)	CA Issuers field
	accessLocation		O	S	http://ca-repository.desc.gov.ae/certificate/devices.crt	Devices CA Certificate download URL
cRLDistributionPoints		False	O			
	distributionPoint		O	D	<a href="http://ca-repository.desc.gov.ae/CRL/Devices/devices_certification_authority_uae_government_ae_crfilec<CRLNumber>.crl">http://ca-repository.desc.gov.ae/CRL/Devices/devices_certification_authority_uae_government_ae_crfilec<CRLNumber>.crl	CRL download URL
Subject Properties						
subjectKeyIdentifier		False	M			
	keyIdentifier		M	S	SHA-1 Hash	
Key Usage Properties						
keyUsage		True	O			
	digitalSignature		M	S	True	

extendedKeyUsage	True	M			
timeStamping		M	S	True	
Certificate Policy Property					
certificatePolicies	False	M			
policyIdentifier		M	S	2.16.784.1.2.2.100.1.2.1.2	
policyQualifiers:policyQualifierId		M	S	id-qt 1	
policyQualifiers:qualifier:cPSuri		M	D	URL location of Devices CA's CPS	
certificatePolicies	False	M			
policyIdentifier		M	S	2.16.784.1.2.2.100.1.3.1.1	
policyQualifiers:policyQualifierId		M	S	id-qt 1	
policyQualifiers:qualifier:cPSuri		M	D	URL location of the TSA practice disclosure statement	

7.2 CRL Profile

7.2.1 Version Number(s)

The version field in the certificate states 1, indicating X.509 v2 CRL.

7.2.2 CRL and CRL Entry Extensions

The CRL extensions contain the CRL Number (a sequential number incremented with each new CRL produced). Please refer to section 7.2.3 below for the other supported extension in the CRLs issued by the Devices CA.

7.2.3 CRL ASN1 Description

This is the complete ASN1 description of the CRL certificate.

Field	CE ¹³	CO ¹⁴	Value	Comment
Certificate List				
TBSCertificate				
Signature	False			
algorithm		S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
signatureValue		D	Devices CA Signature	CA signature value

¹³ CE = Critical Extension.

¹⁴ CO = Content: S = Static, D = Dynamic

Dubai PKI - Devices CA
Certificate Practice Statement

TBSCertList					
Version		False			
			S	2	Version 3
SerialNumber		False			
	certificateSerialNumber		D		At least 64 bits of entropy Validated on duplicates
Signature		False			
	algorithm		S	OID = 1.2.840.113549.1.1.11	SHA256 with RSA Encryption
Issuer		False	S		
	countryName		S	AE	Encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)
	organizationName		S	UAE Government	UTF8 encoded
	commonName		S	Devices Certification Authority	UTF8 encoded
Validity		False			Implementations MUST specify using UTC time until 2049 from then on using Generalized Time
	ThisUpdate		D	CRL generation date/time	
	NextUpdate		D	CRL generation date/time + 3 days + 2 hours	
Revoked Certificates					
certificate					
	certificateSerial		D	Serial of the revoked certificate	
	revocationDate		D	UTC Time of revocation (Optional)	
crlExtensions					

authorityKeyIdentifier	False	D	This MUST be the same value as the subject Key Identifier field in the CRL Issuer's certificate. Non-critical <subject key identifier CA>	SHA-1 Hash of the Devices CA public key
crlNumber	False	D	< Sequential CRL number >	
IssuingDistributionPoint	True			Mandatory for Partitioned RLs
DistributionPoint		D	CN=CRL<CRL Number> CN=Devices Certification Authority O=UAE Government C=AE	Partitioned CRL directory address, where <CRL Number> a dedicated sequence number that the CA uses for CRL file naming
DistributionPoint		D	http://ca-repository.desc.gov.ae/CRL/Devices/devices_certification_authority_uae_government_ae_crlfilec<CRLNumber>.crl	CRL hosting URL, where <CRL Number> a dedicated sequence number that the CA uses for CRL file naming
onlyContainsCACerts		S	No	
onlyContainsUserCerts		S	Yes	
IndirectCRL		S	No	
expiredCertsOnCRL (2.5.29.60)	False	D	< a date-time value specifies the date on or after which revoked certificates are retained on the CRL>	
authorityInfoAccess	False	S		
AccessMethod		S	Id-ad-2.2 id-ad-caissuers OID i.e.1.3.6.1.5.5.7.48.2 (ca cert)	CA Issuers field
accessLocation		S	http://ca-repository.desc.gov.ae/certificate/devices.crt	Devices CA certificate download URL

7.3 OCSP Profile

7.3.1 Version Number(s)

The OCSP responder issues OCSP responses of version 1.

7.3.2 OCSP Extensions

No stipulation — this section intentionally left blank.

7.3.3 OCSP Response Signing Certificate ASN1 Description

This is the complete ASN1 description of the certificate associated to the OCSP response signing private key.

Field	CE ¹⁵	O/M ¹⁶	CO ¹⁷	Value	Comment
Certificate		M			
TBSCertificate		M	D		See 4.1.2
Signature	False	M			
algorithm		M	S	OID = 1.2.840.113549.1.1. 11	SHA256 with RSA Encryption
signatureValue		M	D	Devices CA Signature	CA signature value
TBS Certificate					
Version	False				
		M	S	2	Version 3
Serial Number	False				
certificateSerialNumber		M	D		At least 64 bits of entropy Validated on duplicates
Signature	False	M			
algorithm		M	S	OID = 1.2.840.113549.1.1. 11	SHA256 with RSA Encryption
Issuer	False	M	S		
countryName		M	S	AE	Encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)
organizationName		M	S	UAE Government	UTF8 encoded
CommonName		M	S	Devices Certification Authority	UTF8 encoded
Validity	False	M			Implementations MUST specify using UTC time until 2049 from

¹⁵ CE = Critical Extension.

¹⁶ O/M: O = Optional, M = Mandatory.

¹⁷ CO = Content: S = Static, D = Dynamic

Dubai PKI - Devices CA
Certificate Practice Statement

						then on using GeneralisedTime
NotBefore			D	Certificate generation process date/time		
NotAfter			D	Certificate generation process date/time + not more than [3] Months		
Subject	False	M				
countryName		M	S	AE	Will be encoded according to "ISO 3166-1-alpha-2 code elements". Printable String, size 2 (rfc5280)	
localityName		M	S	Dubai		
organizationName		M	S	DESC		
commonName		M	S	Devices Certification Authority OCSP "C<n>"	The part "C<n>" is added upon the CA key change over (as specified in section 6.3.2) where <n> is an incremental number starting from 2 and increasing after each CA key change over.	
subjectPublicKeyInfo	False	M				
algorithm		M	S	RSA		
subjectPublicKey		M	D	Public key length: 2048 or 4096 (RSA)		
Extensions		M				
Authority Properties						

Dubai PKI - Devices CA
Certificate Practice Statement

authorityKeyIdentifier		False	O			Mandatory in all certificates except for self-signed CA certificates
	keyIdentifier		M	D	SHA-1 Hash of the Devices CA public key	When this extension is used, this field MUST be supported at minimum
Subject Properties						
subjectKeyIdentifier		False	M			
	KeyIdentifier		M	D	SHA-1 Hash	
Key Usage Properties						
keyUsage		True	M			
	digitalSignature		M	S	True	
	nonrepudiation		M	S	True	
extendedKeyUsage		False	M			
	OCSPSigning		M	S	True	
id-pkix-ocsp-nocheck		False	M	S	05 00	
Certificate Policy Property						
certificatePolicies		False	M			
	PolicyIdentifier		M	S	2.16.784.1.2.2.100.1.2.1.2	
	policyQualifiers:policyQualifierId		O	S	id-qt 1	
	policyQualifiers:qualifier:cPS uri		O	D	URL location of Devices CA's CPS	

8. Compliance Audit and Other Assessments

The Devices CA has been decommissioned and no longer performs Certification Authority issuance or certificate lifecycle management operations.

As a result, no Certification Authority–specific compliance audits or assessments are conducted for the Devices CA following decommissioning.

Certificate status information services (including CRLs and OCSP) for certificates previously issued by this Certification Authority continue to be made available in accordance with the publicly published Decommissioning Notice. These services are provided through DESC’s shared validation infrastructure, which also supports other active Certification Authorities and is subject to compliance audits under the UAE legal framework for Trust Services and relevant ETSI standards.

Such audits apply to the validation service environment as a whole and do not constitute a Certification Authority–specific audit of the decommissioned Devices CA.

Audit reports and assessment records applicable during the operational lifetime of the Devices CA are retained in accordance with the records archival provisions of this CPS and applicable regulatory requirements.

9. Other Business and Legal Matters

Certain Legal conditions apply to the issuance of certificates issued by the Devices CA under this CPS as described in this section.

9.1 Fees

9.1.1 Certificate Issuance or Renewal Fees

Fee details will be provided at the time of certificate issuance.

9.1.2 Certificate Access Fees

Not Applicable.

9.1.3 Revocation or Status Information Access Fees

No fee will be charged for Certificate revocation or status information access.

9.1.4 Fees for Other Service

DESC may charge for other services depending on business needs and subject to the Dubai PKI PA approval.

9.1.5 Refund Policy

Charged fees cannot be refunded.

9.2 Financial Responsibility

9.2.1 Insurance Coverage

DESC ensures that this CA is covered by existing government insurance provisions. Details of coverage are specified in the applicable agreements.

9.2.2 Other Assets

DESC maintains sufficient financial resources to maintain operations and fulfill duties of this CA.

9.2.3 Insurance or Warranty Coverage for End-Entities

Not applicable.

9.3 Confidentiality of Business Information

9.3.1 Scope of Confidential Information

DESC considers the following as confidential information:

- Subscriber's personal information that are not part of certificates or CRLs issued by the Devices CA,
- Correspondence between the subscribers and DESC RA during the certificate management processing (including the collected subscribers data),
- Contractual agreements between DESC and its suppliers,
- The Dubai PKI internal documentation (technical documentation, operational processes,).

9.3.2 Information not within the scope of confidential information

Any information not defined as confidential (refer to section 9.3.1) is deemed public. This includes the information published at the CA repository.

9.3.3 Responsibility to protect confidential information

DESC guarantees the protection of confidential information according to the applicable laws on privacy.

9.4 Privacy of Personal Information

9.4.1 Privacy plan

DESC observes personal data privacy rules and confidentiality rules as described in this CPS. Refer to section 9.4.2 for the cope of private information.

Both private and non-private information can be subject to data privacy rules if the information contains personal data.

Only limited trusted personnel are permitted to access subscribed private information for the purpose of certificate lifecycle management.

DECS does not release any confidential information without the consent of the legitimate data owner or explicit authorization by a court order. When DESC releases private information, DESC ensures through reasonable means that this information is not used for any purpose apart from the requested purposes. Parties requesting and receiving confidential information are granted permission on the condition that they use it for the requested purposes, secure it from compromise, and refrain from using it or disclosing it to third-parties. Also, these parties are bound to observe personal data privacy rules in accordance with the UAE applicable laws.

DESC respects all applicable privacy, confidential information, and trade secret laws and regulations, as well as its published privacy policy in the collection, use, retention and disclosure of non-public information.

All communications channels with DESC/RA shall preserve the privacy and confidentiality of any exchanged private information. Data encryption shall be used when electronic communication channels are used with the Devices CA systems. This shall include:

- The communications link between the Devices CA and the RA.
- Sessions to deliver certificates and certificate status information

9.4.2 Information treated as Private

All personal information that is not publicly available in the content of a certificate or CRL are considered as private information.

9.4.3 Information not Deemed Private

Information included in the certificate or CRL is not considered as private.

9.4.4 Responsibility to protect private information

DESC employees, suppliers and contractors handle personal information in strict confidence under DESC contractual obligations that at least as protective as the terms specified in section 9.4.1.

9.5 Intellectual Property Rights

DESC owns and reserves all intellectual property rights associated with its own databases, web sites, the Devices CA digital certificates and any other publication whatsoever originating from the Devices CA, including this CPS.

When DESC uses software from suppliers, it is possible that this software remains intellectual property of the supplier. This is defined in the license agreement of contract of this supplier.

9.6 Representations and Warranties

9.6.1 CA Representations and Warranties

By issuing a Certificate, the Dubai PKI CA makes the certificate warranties listed herein to the following Certificate Beneficiaries:

- The Subscriber that is a party to the Subscriber Agreement,
- All Application Software Suppliers with whom the Dubai PKI Root CA will enter into a contract for inclusion of its Root Certificate in software distributed by such Application Software Supplier,
- and all Relying Parties who reasonably rely on a Valid Certificate.

DESC represents and warrants to the Certificate Beneficiaries that, during the period when the Certificate is valid, the Devices CA has complied with the Baseline Requirements and its CPS in issuing and managing the Certificate.

The Certificate Warranties specifically include, but are not limited to, the following:

- **Right to Use Domain Name or IP Address:** That, at the time of issuance, the Devices CA
 - I. implemented a procedure for verifying that the Applicant either had the right to use, or had control of, the Domain Name(s) and IP address(es) listed in the Certificate's subject field and subjectAltName extension (or, only in the case of Domain Names, was delegated such right or control by someone who had such right to use or control),
 - II. followed the procedure when issuing the Certificate, and
 - III. accurately described the procedure in this CPS.
- **Authorization for Certificate:** That, at the time of issuance, the Devices CA
 - I. implemented a procedure for verifying that the Subject authorized the issuance of the Certificate and that the Applicant Representative is authorized to request the Certificate on behalf of the Subject,
 - II. followed the procedure when issuing the Certificate, and
 - III. accurately described the procedure in this CPS.
- **Accuracy of Information:** That, at the time of issuance, the Devices CA
 - I. implemented a procedure for verifying the accuracy of all of the information contained in the Certificate,
 - II. followed the procedure when issuing the Certificate, and
 - III. accurately described the procedure in this CPS.
- **Identity of Applicant:** That, if the Certificate contains Subject Identity Information, the Devices CA
 - I. implemented a procedure to verify the identity of the Applicant in accordance with Sections 3.2,
 - II. followed the procedure when issuing the Certificate,
 - III. accurately described the procedure in this CPS.

- **Subscriber Agreement:** That, if the Devices CA and Subscriber are not Affiliated, the Subscriber and CA are parties to a legally valid and enforceable Subscriber Agreement that satisfies these Requirements, or, if the CA and Subscriber are the same entity or are Affiliated, the Applicant Representative acknowledged the Terms of Use.
- **Status:** That the Devices CA maintains a 24 x 7 publicly-accessible Repository with current information regarding the status (valid or revoked) of all unexpired Certificates.
- **Revocation:** That the Devices CA will revoke the Certificate for any of the reasons specified in these Requirements.

9.6.2 RA Representations and Warranties

DESC RA warrant that it performs registration functions as per the stipulations specified in the applicable CP and this CPS.

9.6.3 Subscriber Representations and Warranties

DESC requires, as part of the Subscriber Agreement or Terms of Use, that the Applicant makes the commitments and warranties in this section for the benefit of the Devices CA and the Certificate Beneficiaries.

Prior to the issuance of a Certificate, DESC shall obtain, for its express benefit and the Certificate Beneficiaries, either:

- The Applicant's agreement to the Subscriber Agreement with DESC, or
- The Applicant's acknowledgement of the Terms of Use.

DESC implements a process to ensure that each Subscriber Agreement or Terms of Use is legally enforceable against the Applicant. In either case, the Agreement must apply to the Certificate to be issued pursuant to the certificate request. A separate Agreement is used for each certificate request.

The Subscriber Agreement or Terms of Use contains provisions imposing on the Applicant itself (or made by the Applicant on behalf of its principal or agent under a subcontractor or hosting service relationship) the following obligations and warranties:

- **Accuracy of Information:** An obligation and warranty to provide accurate and complete information at all times to DESC, both in the certificate request and as otherwise requested by DESC in connection with the issuance of the Certificate(s) to be supplied by the Devices CA,
- **Protection of Private Key:** An obligation and warranty by the Applicant to take all reasonable measures to assure control of, keep confidential, and properly protect at all times the Private Key that corresponds to the Public Key to be included in the requested Certificate(s) (and any associated activation data or device, e.g. password or token),
- **Acceptance of Certificate:** An obligation and warranty that the Subscriber will review and verify the Certificate contents for accuracy,
- **Use of Certificate:** When TLS server certificates are requested, an obligation and warranty to install the Certificate only on servers that are accessible at the subjectAltName(s) listed in the Certificate, and to use the Certificate solely in compliance with all applicable laws and solely in accordance with the Subscriber Agreement or Terms of Use,
- **Reporting and Revocation:** An obligation and warranty to:
 - promptly request revocation of the Certificate, and cease using it and its associated Private Key, if there is any actual or suspected misuse or compromise of the Subscriber's Private Key associated with the Public Key included in the Certificate, and

- promptly request revocation of the Certificate, and cease using it, if any information in the Certificate is or becomes incorrect or inaccurate,
- **Termination of Use of Certificate:** An obligation and warranty to promptly cease all use of the Private Key corresponding to the Public Key included in the Certificate upon revocation of that Certificate for reasons of Key Compromise.
- **Responsiveness:** An obligation to respond to DESC's instructions concerning Key Compromise or Certificate misuse within a specified time period.
- **Acknowledgment and Acceptance:** An acknowledgment and acceptance that DESC is entitled to revoke the certificate immediately if the Applicant were to violate the terms of the Subscriber Agreement or Terms of Use or if revocation is required by this CPS, or the Baseline Requirements.

9.6.4 Relying Party Representations and Warranties

Relying Parties who rely upon the certificates issued under the Devices CA shall:

- Use the certificate for the purpose for which it was issued, as indicated in the certificate information (e.g., the key usage extension),
- Verify the Validity by ensuring that the Certificate has not Expired,
- Establish trust in the CA who issued a certificate by verifying the certificate path in accordance with the guidelines set by the X.509 Version 3 Amendment,
- Ensure that the Certificate has not been revoked by accessing current revocation status information available at the location specified in the Certificate to be relied upon, and
- Determine that such Certificate provides adequate assurances for its intended use.

9.6.5 Representations and Warranties of Other Participants

No stipulation.

9.7 Disclaimers of Warranties

Within the limitations of the laws in Dubai, DESC cannot be held liable (except in case of fraud or deliberate abuse) for:

- Profit loss
- Loss of data
- Indirect damage that is the consequence of or related to the use, provisioning, issuance or non-issuance of certificate or digital signatures
- Any liability incurred in any case if the error in such verified information is the result of fraud or willful misconduct of the applicant or if it is the result of negligence or with intent to deceive DESC, the Devices CA, or any person receiving or relying on the certificate
- Any liability incurred as a result of the applicant breaking any laws applicable in Dubai, including those related to intellectual property protection, viruses, accessing computer systems, etc.
- Other damage

9.8 Limitations of Liability

The Devices CA does not offer any guarantees or warranties or enter into agreements that could be the subject of performance penalties, that could lead to legal actions on behalf of Subscribers or relying parties.

9.9 Indemnities

Not applicable.

9.10 Term and Termination

9.10.1 Term

This CPS remains in force until notice of the opposite is communicated by DESC on its document repository (see Chapter 2 “Publication and Repository Responsibilities”).

9.10.2 Termination

Amendments to this document are applied and approved by the Dubai PKI PA and marked by an indicated new version of the document. Upon publishing on the Devices CA repository, the newer version becomes effective. The older versions of this document are also archived on the Devices CA repository.

9.10.3 Effect of Termination and Survival

Termination or decommissioning of the Devices CA shall not affect provisions of this CPS that by their nature are intended to survive termination, including but not limited to provisions relating to records archival and retention, confidentiality, privacy, disclaimers of warranties, limitation of liability, indemnities, and dispute resolution. Following decommissioning, the Devices CA shall remain inactive and shall not resume certificate issuance or lifecycle management operations. Certificate status information generated prior to decommissioning, including CRL and OCSP, shall remain available for the duration and under the conditions specified in the publicly published Decommissioning Notice.

9.11 Individual Notices and Communications with Participants

Notices related to this CPS can be addressed to the Dubai PKI PA contact address as stated in section 1.5.

9.12 Amendments

9.12.1 Procedure for Amendment

When changes are required to be done on this CPS. The Dubai PKI PA will incorporate any such change into a new version of this document and, upon approval, publish the new version. The new document will carry a new version number.

9.12.2 Notification Mechanism and Period

The Dubai PKI PA reserve the right to amend this CPS without notification for amendments that are not material, including without limitation corrections of typographical errors or minor enhancements. The decision to designate amendments as material or non-material shall be at the Dubai PKI PA sole discretion.

9.12.3 Circumstances Under Which OID Must be Changed

Major changes to this CPS that may materially change the acceptability of certificates for specific purposes, may require corresponding changes to the OID or qualifier (URL).

9.13 Dispute Resolution Procedures

Any dispute arising out of or related to the digital certificates issued by the Dubai PKI shall be first addressed to the Dubai PKI PA. If mediation is not successful, then the dispute will be escalated to the relevant court in Dubai.

9.14 Governing Law

The laws of Dubai shall govern the enforceability, construction, interpretation and validity of the present CPS.

9.15 Compliance with Applicable Law

The present CPS and provision of Devices CA certification services are compliant to relevant, and applicable laws in Dubai.

9.16 Miscellaneous Provisions

9.16.1 Entire Agreement

No stipulation.

9.16.2 Assignment

Except where specified by other contracts, no party may assign or delegate rights or duties under this CPS, without the prior written consent of DESC.

9.16.3 Severability

In the event of a conflict between the Baseline Requirements and any regulation in Dubai, DESC may modify any conflicting requirement to the minimum extent necessary to make the requirement valid and legal in Dubai. This applies only to operations or certificate issuances that are subject to that Law. In such event, DESC will immediately (and prior to issuing a certificate under the modified requirement) include in this section a detailed reference to the Law requiring a modification of the Baseline Requirements under this section, and the specific modification to the Baseline Requirements implemented by DESC. DESC will also (prior to issuing a certificate under the modified requirement) notify the CA/Browser Forum of the relevant information newly added to its CPS. Any modification to DESC practice enabled under this section will be discontinued if and when the Law no longer applies,

or the Baseline Requirements are modified to make it possible to comply with both them and the Law simultaneously. An appropriate change in practice, modification to this CPS and a notice to the CA/Browser Forum, as outlined above, is made within 90 days.

9.16.4 Enforcement (Attorney Fees/Waiver of Rights)

No stipulation.

9.16.5 Force Majeure

DESC shall not be liable for any failure or delay in their performance under the provisions of this CPS due to causes that are beyond their reasonable control, including, but not limited to unavailability of interruption or delay in telecommunications services.

9.17 Other Provisions

Not applicable.